

MMA-495933-M5 4.9 – 5.9 GHz Linear Power Amplifier

Features:

- Frequency Range: 4.9 to 5.9 GHz
- 46 dBm IP3
- 33 dBm P1dB
- 26 dBm Pout @ 2.0 % EVM
- 11.0 dB Gain
- Input and Output Matched to 50 Ω for Easy Cascade
- Surface Mount QFN 5 x 5 mm Package



Applications:

- 802.16 WiMax
- 802.11 WLAN
- Point-To-Point Radio Communications
- Telecomm Infrastructure

Description:

The MMA-495933-M5 is a 2.0 watt amplifier pre-matched to 50 ohm operating over frequency range 4.9 GHz to 5.9 GHz. The RF gain is 11.0 dB. The typical output IP3 is 46 dBm and P1dB is 33 dBm. The MMA-495933-M5 amplifier has excellent performance for 802.11 WLAN and 802.16 WiMax applications. At 2.0 % error vector magnitude (EVM), the amplifier can achieve an average output power of 26 dBm. The MMA-495933-M5 is packaged in a quad flat no-lead (QFN) with a copper base paddle which offers excellent thermal conductance, reduced lead inductance, small size, near chip-scale footprint and thin profile.

Electrical Specifications: $V_{ds} = 7.5 \text{ V}$, $T_a = 25 \text{ }^\circ\text{C}$, $Z_0 = 50 \text{ } \Omega$, $V_{gs} = -0.85 \text{ V}$, $I_{dg} = 600 \text{ mA}$

Parameter	Units	Min	Typical	Max
Frequency Range	GHz	4.9		5.9
Small Signal Gain	dB	10.0	11.0	
Input / Output VSWR	N/A		2.0:1 / 3.7:1	
Pout at 1 dB Compression Point	dBm	+32.5	+33.0	
Pout @ 2 % EVM (1)	dBm		26	
Output Third Order Intercept (2)	dBm		46	
DC Current	mA		600	
Gate Voltage(VGS)	V		-1.0	
Thermal Resistance Junction to Case	$^\circ\text{C/W}$		16	





(1) The output power is 26 dBm for 2.0 % EVM and the test signal is 802.16, 256-carriers, 64-QAM with 2 / 3 coding factor. The measured EVM includes the accumulated errors (0.8 %) from the modulator and driver stages.

(2) The output power per tone is 22 dBm and the tone separation is 20 MHz center at 5.5 GHz.

MMA-495933-M5

4.9 – 5.9 GHz Linear Power Amplifier

Typical RF Performance: $V_{ds} = 7.5\text{ V}$, $V_{gs} = -1.0\text{ V}$, $I_{ds} = 600\text{ mA}$, $Z_0 = 50\ \Omega$, $T_a = 25\text{ }^\circ\text{C}$

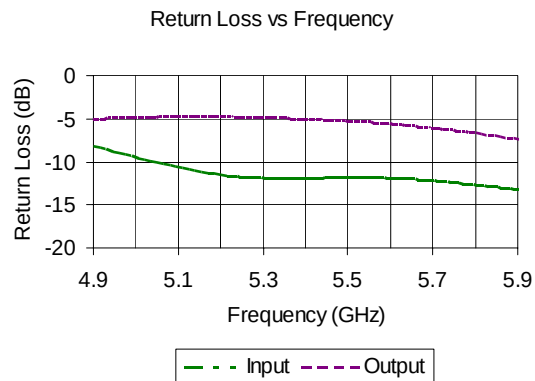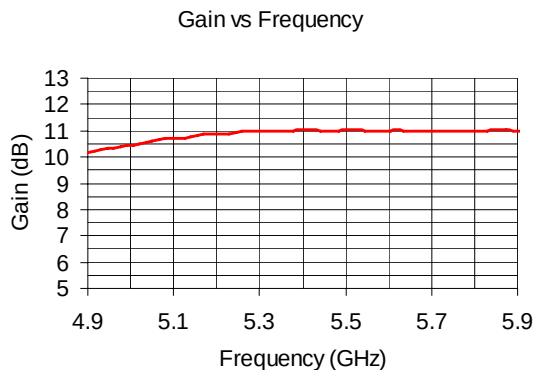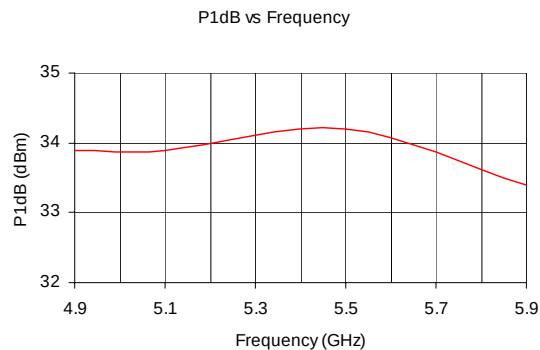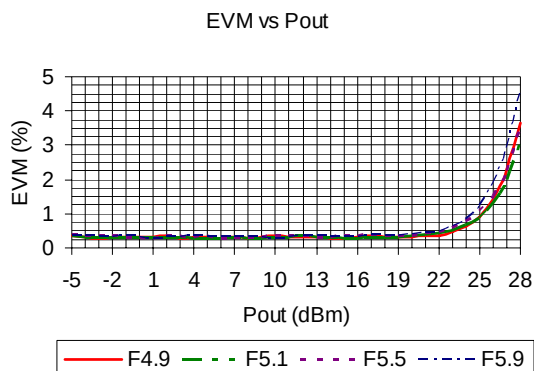

ESD Caution



High-performance RF integrated circuits are highly sensitive to electrostatic discharge (ESD) and may contain unprotected inputs and outputs. Handling and assembly should be conducted in an ESD-controlled environment. It is recommended that ESD precautions and protocols are adopted to minimise the risk of electrostatic discharge and protect product integrity.

MMA-495933-M5

4.9 – 5.9 GHz Linear Power Amplifier

Absolute Maximum Ratings: ($T_a = 25\text{ }^{\circ}\text{C}$)*

PARAMETERS	UNITS	ABSOLUTE MAXIMUM
Bias Voltage (VDS)	V	8.5
Continuous RF Input Power	dBm	+30
Peak Input Power	dBm	+33
Operating Temperature	$^{\circ}\text{C}$	-40 to +85
Storage Temperature	$^{\circ}\text{C}$	-65 to +150

*Operation of this device above any one of these parameters may cause permanent damage.


Typical Scattering Parameters: $V_{ds} = 7.5\text{ V}$, $V_{gs} = -0.9\text{ V}$, $I_{ds} = 600\text{ mA}$, $Z_0 = 50\text{ }\Omega$, $T_a = 25\text{ }^{\circ}\text{C}$

Freq (GHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
4.50	0.58	12.98	2.91	0.321	0.039	-65.1	0.42	-123.15
4.60	0.55	-3.95	2.95	-16.40	0.042	-82.14	0.46	-129.49
4.70	0.50	-21.89	3.02	-32.99	0.044	-99.79	0.51	-135.38
4.80	0.47	-41.41	3.09	-49.68	0.047	-117.69	0.54	-140.75
4.90	0.39	-63.21	3.19	-66.76	0.05	-135.82	0.56	-145.62
5.00	0.34	-87.96	3.29	-84.69	0.052	-153.91	0.57	-150.16
5.10	0.29	-116.06	3.38	-103.06	0.054	-172.01	0.58	-154.50
5.20	0.27	-146.83	3.46	-121.82	0.056	169.92	0.57	-158.81
5.30	0.25	-178.36	3.50	-140.56	0.059	151.74	0.57	-163.22
5.40	0.25	151.23	3.52	-159.17	0.061	133.45	0.56	-167.68
5.50	0.26	122.38	3.51	-177.74	0.063	115.10	0.54	-176.57
5.60	0.25	94.62	3.51	163.49	0.064	96.64	0.52	-176.57
5.70	0.25	66.79	3.51	144.51	0.066	77.99	-0.49	179.20
5.80	0.23	37.69	3.51	124.99	0.068	58.98	0.46	175.16
5.90	0.22	6.29	3.51	104.90	0.070	19.74	0.39	167.02
6.00	0.21	-27.52	3.49	84.28	0.072	19.74	0.39	167.02
6.10	0.21	-62.14	3.44	63.09	0.073	-0.53	0.36	162.48
6.20	0.21	-95.69	3.37	41.27	0.073	-21.21	0.32	157.70
6.30	0.20	-128.03	3.27	18.99	0.073	-42.40	0.27	153.51
6.40	0.18	-161.31	3.15	-3.87	0.072	-64.18	0.22	151.77
6.50	0.13	158.70	3.00	-27.27	0.069	-86.44	0.17	156.32

MMA-495933-M5


4.9 – 5.9 GHz Linear Power Amplifier

Package Pin-out:

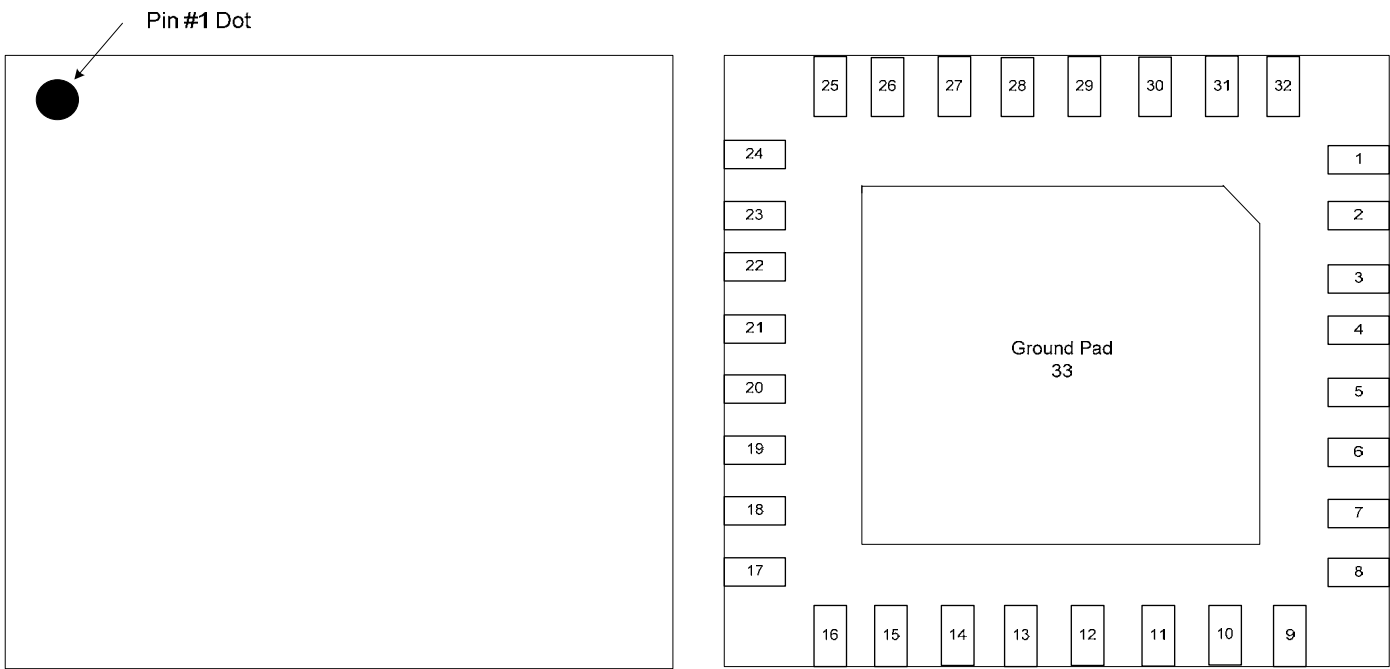


Pin	Description
4, 5	RFin
20, 21	RFout
13	Vdd
29	Vgs
1, 8, 9, 16, 17, 24, 25, 32	Ground
2, 3, 6, 7, 10, 11, 12, 14, 15, 18, 19, 22, 23, 26, 27, 28, 30, 31	N/C

Mechanical Information:

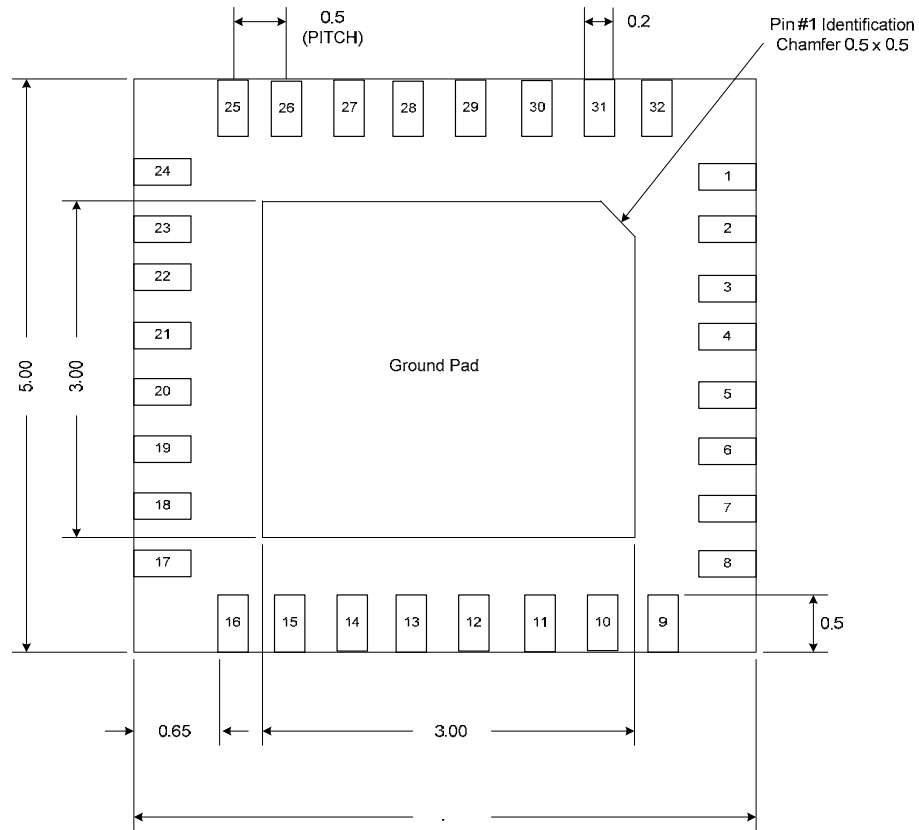

BOTTOM VIEW



SIDE VIEW

The units are in [mm].

Application Note:


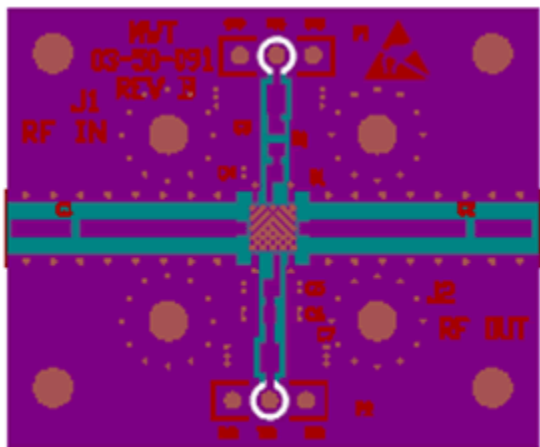


Figure 1 Evaluation Board

The measurements presented are recorded at $V_{dd} = 7.5$ volts and $I_{ds} = 600$ mA. The evaluation board layout is shown in Figure 1. Rogers 4003 is the choice for many RF board materials because of its high frequency response, temperature stability and low cost. The board height is 20 mils and the copper trace weight is 1 oz. Many through holes with a drill diameter of 12 mils are spread uniformly across the center pad for thermal relief and RF ground. It is recommended that via holes be placed nearby the DC bias connector to maintain ground continuity between the top and bottom ground planes. Mounting holes near the unit will help secure the board to the chassis, minimize ground current loops and improve thermal conductivity in the absence of sweat soldering the board to the chassis.



The via hole design, shown in Figure 2, uses two via patterns that are interleaved; one is 5 x 5 and the other is 4 x 4; the finished via hole diameter is 9 mils. The pitch between holes is 25 mils. The simulated thermal impedance is less than $0.9^{\circ}\text{C} / \text{W}$. The PCB finish is nickel over copper with a gold flash.

Please consult CML Micro to request s-parameters, Gerber file and samples.

Figure 2 Hole Pattern

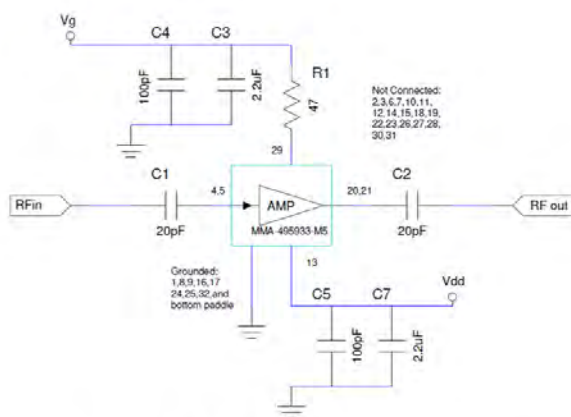


Figure 3, Evaluation Board Schematic

The MMA-495933-M5 amplifier includes two built-in bias tees for gate control at QFN pin 10 and for drain control at QFN pin 22. In addition, the MMA-495933-M5 has its own DC blocking capacitors. The breakdown voltage for the blocking capacitor is 22 VDC. The schematic for the evaluation board is shown in Figure 3. The evaluation board has two bias terminals; terminal P1 is for gate control and terminal P2 is for drain control. The gate control should be adjusted first before setting the drain. The typical gate voltage is -1.0 volts and the drain voltage is 7.5 volts. The bias current is approximately 600 mA with no RF applied. These bias conditions can vary with the application requirements; that is, setting lower current for low power or setting higher current for pristine performance.

Application Note (cont):

The typical small signal gain response, shown in Figure 4, varies from 10 to 11 dB over the frequency range 4.9 to 5.9 GHz. The output IP3 response shown in Figure 5 uses a two tone separation of 20 MHz at 4.9 and 5.9 GHz. Notice that linearity of this amplifier is maintained at very low power levels which give rise to better signal to noise interference ratio.

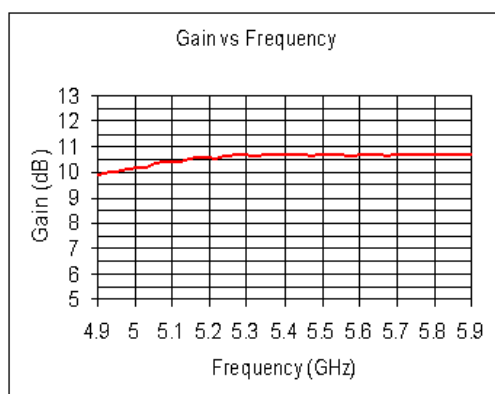


Figure 4 Gain Response

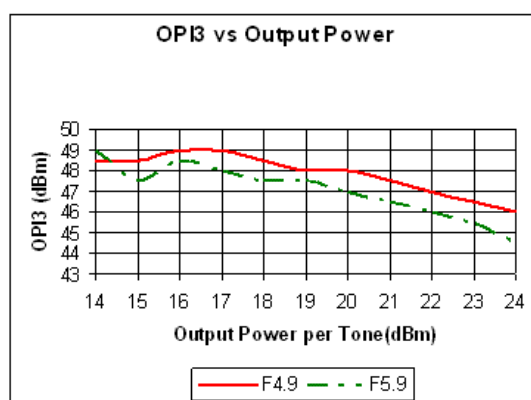


Figure 5 OIP3

A block diagram of the WiMAX test setup is shown in Figure 6. The burst frame length is 141 symbols and the channel bandwidth is 3.5 MHz. A summary of the burst is shown in Figure 7.

The measured EVM error is segmented into two sections. The SMU200A contributes about 0.5 %, and the driver contributes about 0.3 % to the total EVM. The EVM measurement includes the 0.8 % error from the driver and source. The residual EVM error for the MMA-495933-M5 is 1.2 % at burst power of 27 dBm.

Downlink Burst Summary List					
Burst	Area	Modulation	Length	Power(dBm)	EVM(dB)
Burst 1	Preamble	BPSK	1	29.72	-39.6
	Data	BPSK	11	26.83	-33.74
Burst 2	Data	QPSK	20	26.82	-34.25
Burst 3	Data	16QAM	30	26.82	-34.1
Burst 4	Data	64QAM	79	26.79	-34.21
Overall			141	27.57	-34.74

Figure 7 Example of Burst Summary

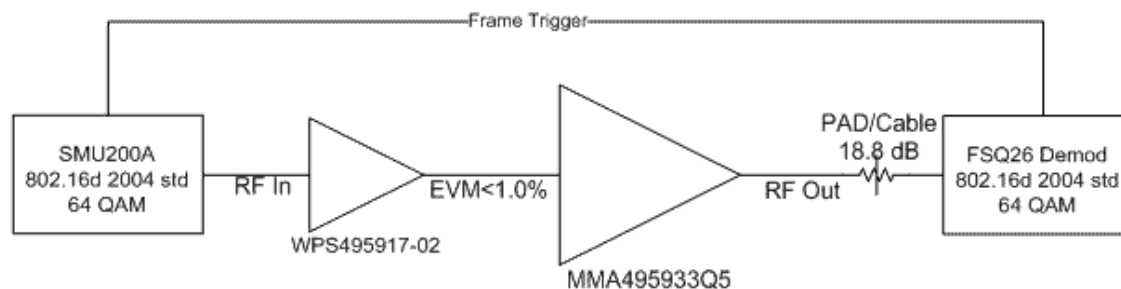


Figure 6 WiMax Test Setup

Application Note (cont):

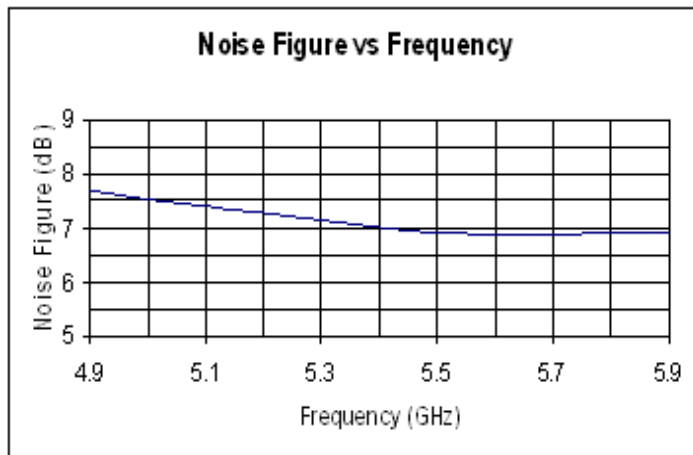


Figure 8 Noise Figure

The noise figure, shown in Figure 8, is less than 8.0 dB across the frequency range 4.9 to 5.9 GHz. The MMA-495933-M5 includes a stability resistor that adds to the noise figure.

The typical noise floor for an on-chip WiMAX modulator is -107 dBm per MHz. Assume that the total system gain is approximately 35 dB and the pre-driver stage used has a gain of 25 and noise figure of 5.5 dB. The noise floor to PA is -79 dBm per MHz. The noise floor at the output of the MMA-495933-M5 is -68.5 dBm per MHz. This shows that sensitivity for this system is -29 dBm per 3.5 MHz for SNR = 34 dB. The MMA-495933-M5 does not noise limit the system performance.

IEEE 802.16-2004 OFDM			
Frequency: 5.5 GHz	Signal Level Setting: 7.4 dBm	External Att: 18.8 dB	
Sweep Mode: Continuous	Trigger Mode: External	Trigger Offset: -10 μ s	
Burst Type: OFDM DL Burst	Modulation: ALL	No Of Data Symbols: 1/2425	

Result Summary						
No. of Bursts	4					
	Min	Mean	Limit	Max	Limit	Unit
EVM All Carriers	1.94	1.98	2.82	2.05	2.82	%
EVM Data Carriers	1.95	1.98		2.05		%
EVM Pilot Carriers	1.83	1.90		2.05		%
IQ Offset	0.13	0.13	17.78	0.13	17.78	%
Gain Imbalance	0.08	0.08		0.08		%
Quadrature Error	- 0.002	- 0.002		- 0.002		°
Center Frequency Error	244.27	244.27	± 44000	244.27	± 44000	Hz
Clock Error	0.03	0.03	± 8	0.03	± 8	ppm
Burst Power	27.12	27.15		27.16		dBm
Crest Factor	8.32	8.53		8.77		dB
RSSI	11.26	11.26		11.26		dBm
RSSI Standard Deviation		- 11.16				dB
CINR	39.70	39.70		39.70		dB
CINR Standard Deviation		2.83				dB

Figure 9 802.16 256-carriers, 64-QAM at 5.5 GHz, Pavg = 2.71 dBm @ 2 % EVM

Application Note (cont):

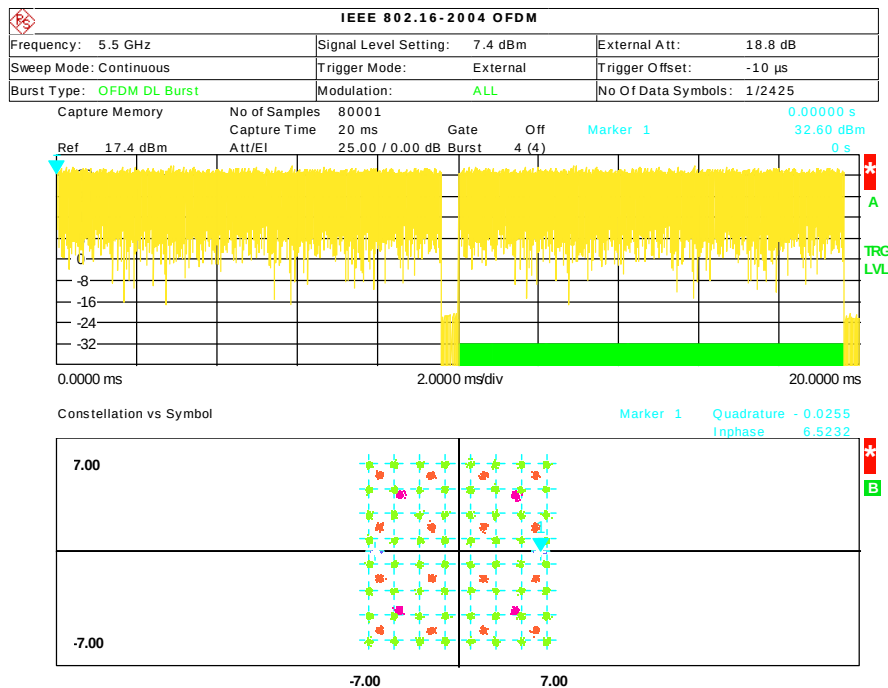


Figure 10 - WiMax constellation
Pavg = 27 dBm at 5.5 GHz for
2.0% EVM for all carriers.

The test pattern is 256-carriers
and modulations are QPSK,
16-QAM and 64-QAM.

The signal power versus time is
shown in yellow.

The constellation shown
represents QPSK, 16-QAM and
64-QAM.

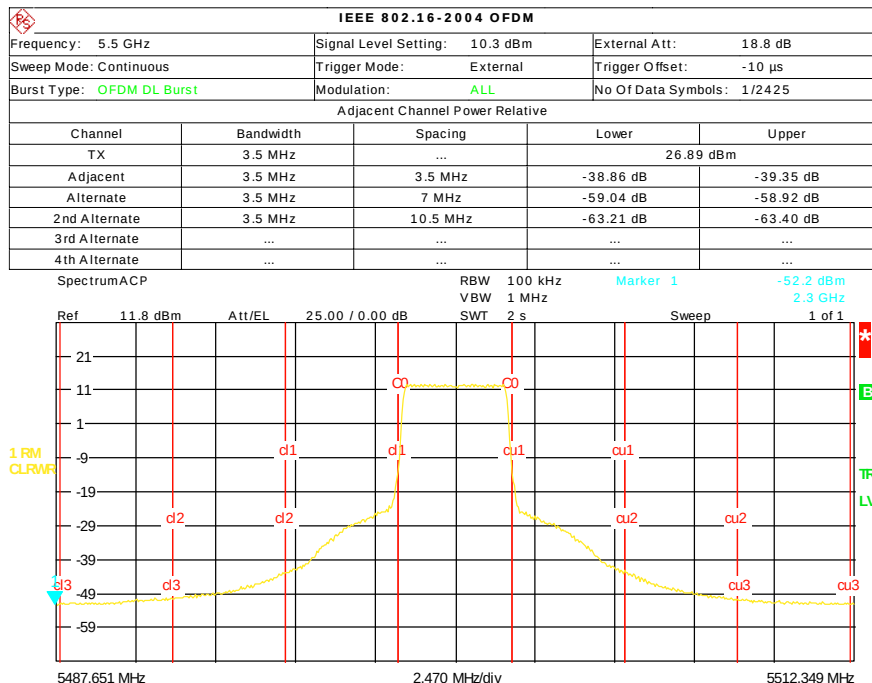


Figure 11 - ACPR at Pavg =
27 dBm at 5.5 GHz.

The channel bandwidth is
3.5 MHz. The first adjacent
channel ratio is -39 dBc; the
second channel ratio is -59 dBc.

RoHS Compliance



CML Micro certifies, to the best of our knowledge, that its products comply with RoHS directive (2011/65/EU), as amended by Directive (EU) 2015/863.

REACH Compliance



CML Micro certifies, to the best of our knowledge, that its products do not contain any of the banned substances specified in the SVHC list at <https://echa.europa.eu/candidate-list-table>. CML Micro are committed to ensuring the safety of products and the compliance with regulations. Publications will be updated in the event that REACH control is compromised.

Contact Information

For further information please contact your local CML sales representative.
Contact details can be found at www.cmlmicro.com.

Important notice: The information provided in this document is believed to be accurate and reliable however, CML assumes no responsibility for any errors or omissions in this document. CML reserves the right to make changes to this document at any time without notice.

The product(s) referenced within this document are not designed, authorized, or warranted for use in life support, life-critical, surgical or nuclear applications, nor in any application where the failure of the product could create a situation where personal injury or death may occur. Customers using or selling the product for such applications do so entirely at their own risk and without any recourse to CML, financial or otherwise.

CML assumes no liability for applications assistance or the design of customers' products. Customers are solely responsible for the design, validation, and testing of customer products as well as compliance with all legal, regulatory, and safety-related requirements concerning their applications.

ALL SPECIFICATIONS AND DATA ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. PRODUCTS ARE PROVIDED UNDER THE TERMS OF CML'S CONDITIONS OF SALE.

Nothing in this document or any purchase of CML products shall be construed as granting any license, whether express or implied, under any patent, copyright, trade secret, or other intellectual property right owned or controlled by CML.