


MMA-273336-M5 27 - 33 GHz, 4 W MMIC Power Amplifier

Features:

- Frequency Range: 27 – 33 GHz
 - P1dB: +36 dBm
 - IM3 Level: -38 dBc @Po = 20 dBm / tone
 - Gain: 22 dB
 - Vdd = 6 V
 - Idsq = 1500 to 2800 mA
 - Input and Output Fully Matched to 50 Ω
- Surface Mount, RoHs Compliant QFN 5 x 5 mm package

Applications:

- P2P Radio
- V-sat

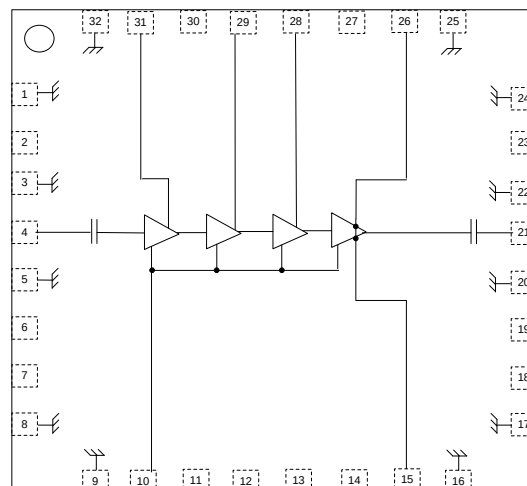

Functional Block Diagram

Description:

The MMIC is a high power amplifier MMIC in a surface mount package designed for use in transmitters that operate at frequencies between 27 GHz and 33 GHz. In the operational frequency band, it provides 36 dBm of output power (P-1dB) and 22 dB of small-signal gain.

Absolute Maximum Ratings: (Ta = 25 °C)*

SYMBOL	PARAMETERS	UNITS	Min.	Max.
Vds	Drain-Source Voltage	V		6.5
Vg	Gate-Source Voltage	V	-2.1	0
Ig	First Gate Current	mA	-17	17
Pd	Power Dissipation	W		24
Pin max	RF Input Power	dBm		20
Toper	Operating Temperature	°C		-40 to +85
Tch	Channel Temperature	°C		+160
Tstg	Storage Temperature	°C		-55 to +150
Tmax	Max. Assembly Temp (20 sec max)	°C		+250

*Operation of this device above any one of these parameters may cause permanent damage.

MMA-273336-M5

27 - 33 GHz, 4 W MMIC Power Amplifier

Electrical Specifications: $V_{ds} = 6\text{ V}$, $V_{gs} = -0.85\text{ V}$, $I_{dsq} = 2200\text{ mA}$, $T_a = 25\text{ }^{\circ}\text{C}$, $Z_0 = 50\text{ }\Omega$

Parameter	Units	Typical Data
Frequency Range	GHz	27 - 33
Gain (Typ / Min)	dB	22 / 20
Gain Flatness (Typ / Max)	$\pm$ dB	3 / 4
Input RL (Typ / Max)	dB	10 / 8
Output RL (Typ / Max)	dB	10 / 8
Output P1dB (Typ / Min)	dBm	35.5 / 35
Output P3dB (Typ / Min)	dBm	36.5 / 36
IM3 Level ⁽¹⁾	dBc	-36
Thermal Resistance	$^{\circ}\text{C} / \text{W}$	3.8
Operating Current at P1dB (Typ / Max)	mA	2500 / 3000

(1) Output IP3 is measured with two tones at output power of 20 dBm/tone separated by 20 MHz.

ESD Caution




High-performance RF integrated circuits are highly sensitive to electrostatic discharge (ESD) and may contain unprotected inputs and outputs. Handling and assembly should be conducted in an ESD-controlled environment. It is recommended that ESD precautions and protocols are adopted to minimise the risk of electrostatic discharge and protect product integrity.


MMA-273336-M5

27 - 33 GHz, 4 W MMIC Power Amplifier


Typical RF Performance: $V_{ds} = 6\text{ V}$, $V_{gsq} = -0.85\text{ V}$, $I_{dsq} = 2200\text{ mA}$, $Z_0 = 50\ \Omega$, $T_a = 25\text{ }^\circ\text{C}$

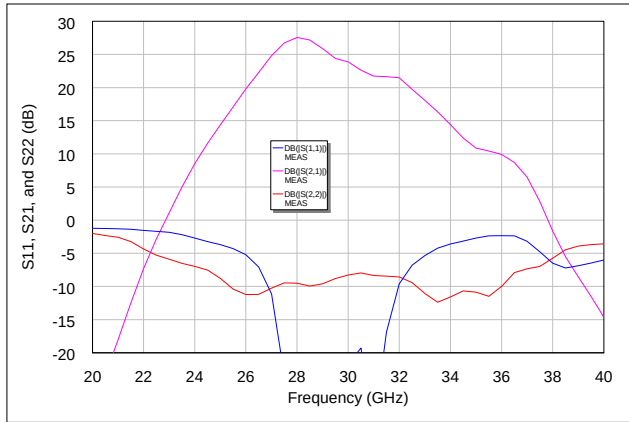


S11, S21, and S22 vs. Frequency

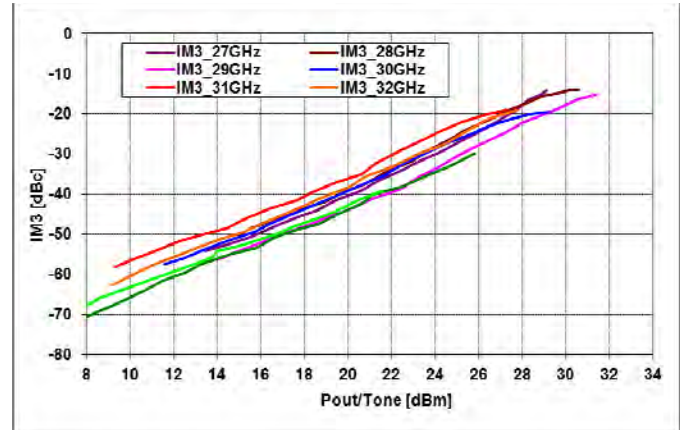

IM3 level [dBc] vs. Output power/tone [dBm]

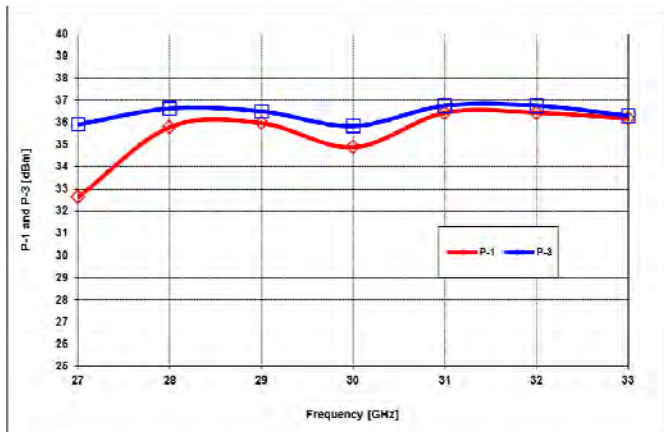

P-1 and P-3 vs. Frequency

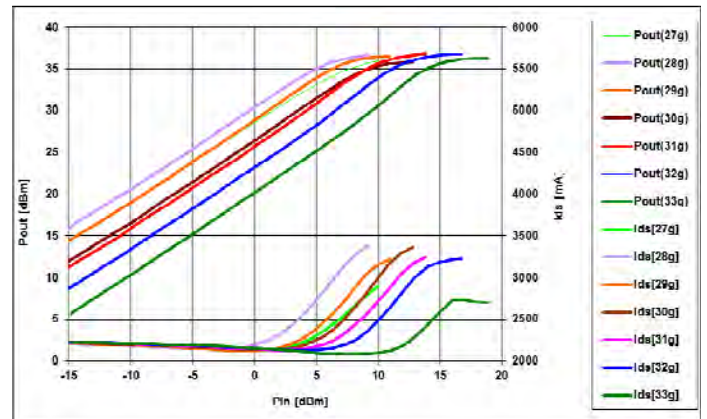


Po (dBm), and Ids (mA) vs. Pin (dBm)


MMA-273336-M5

27 - 33 GHz, 4 W MMIC Power Amplifier


Typical Bias dependent RF Performance:

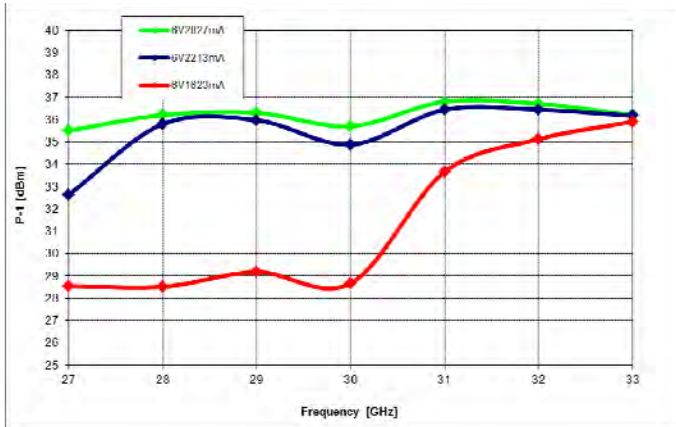


Bias dependent P1 vs. Frequency

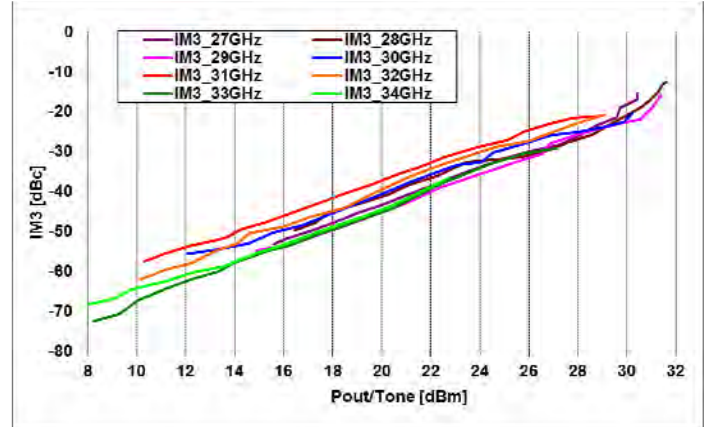

IM3 Level [dBc] vs. output power/tone [dBm]
@Vds=6V, Idsq=2.8A

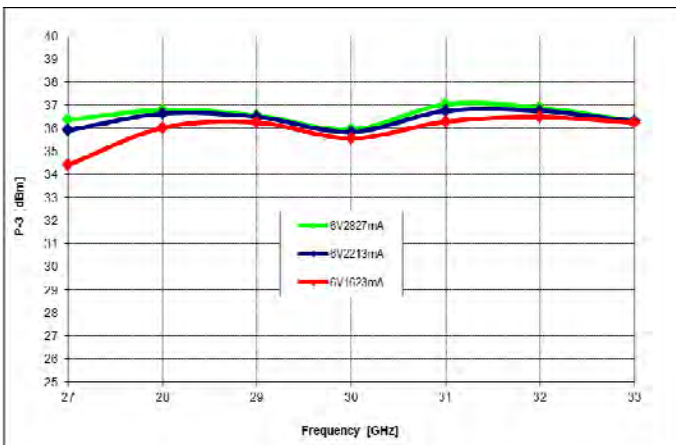

Bias dependent P-3 vs. Frequency

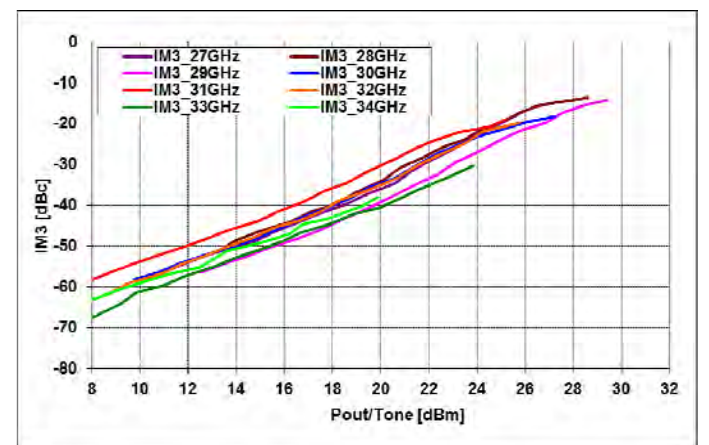

Pout [dBm], and Ids [mA] vs. Input power [dBm]
@Vds = 6 V, Idsq = 1.5 A

Applications

The **MMA-273336-M5** MMIC power amplifier is designed for use as a power stage amplifier in microwave transmitters. It is ideally suited for 27 to 33 GHz band V-sat transmitter applications requiring excellent saturated output power performance. This amplifier is provided as a 5 x 5 mm QFN package, and the packaged amplifier is fully compatible with industry standard high volume surface mount PCB assembly processes.

Biasing and Operation

The recommended bias conditions for best performance for the **MMA-273336-M5** are $V_{DD} = 6.0\text{ V}$, $I_{dsq} = 2200\text{ mA}$. Performance improvements are possible depending on applications. The drain bias voltage range is 5 to 6 V and the quiescent drain current biasing range is 1500 mA to 2800 mA. A single DC gate supply connected to V_g will bias all the amplifier stages. Muting can be accomplished by setting V_g to the pinch-off voltage ($V_p = -2\text{ V}$). The gate voltage (V_g) should be applied prior to the drain voltages (V_{d1} , V_{d2} , V_{d3}) during power up and removed after the drain voltages during power down. The RF input and output ports are DC decoupled internally. Typical DC supply connection with bi-passing capacitors for the **MMA-273336-M5** is shown in following pages.


Assembly Techniques

GaAs MMICs are ESD sensitive. ESD preventive measures must be employed in all aspects of storage, handling, and assembly. MMIC ESD precautions, handling considerations, die attach and bonding methods are critical factors in successful GaAs MMIC performance and reliability.

MMA-273336-M5

27 - 33 GHz, 4 W MMIC Power Amplifier

Package Pin-out:

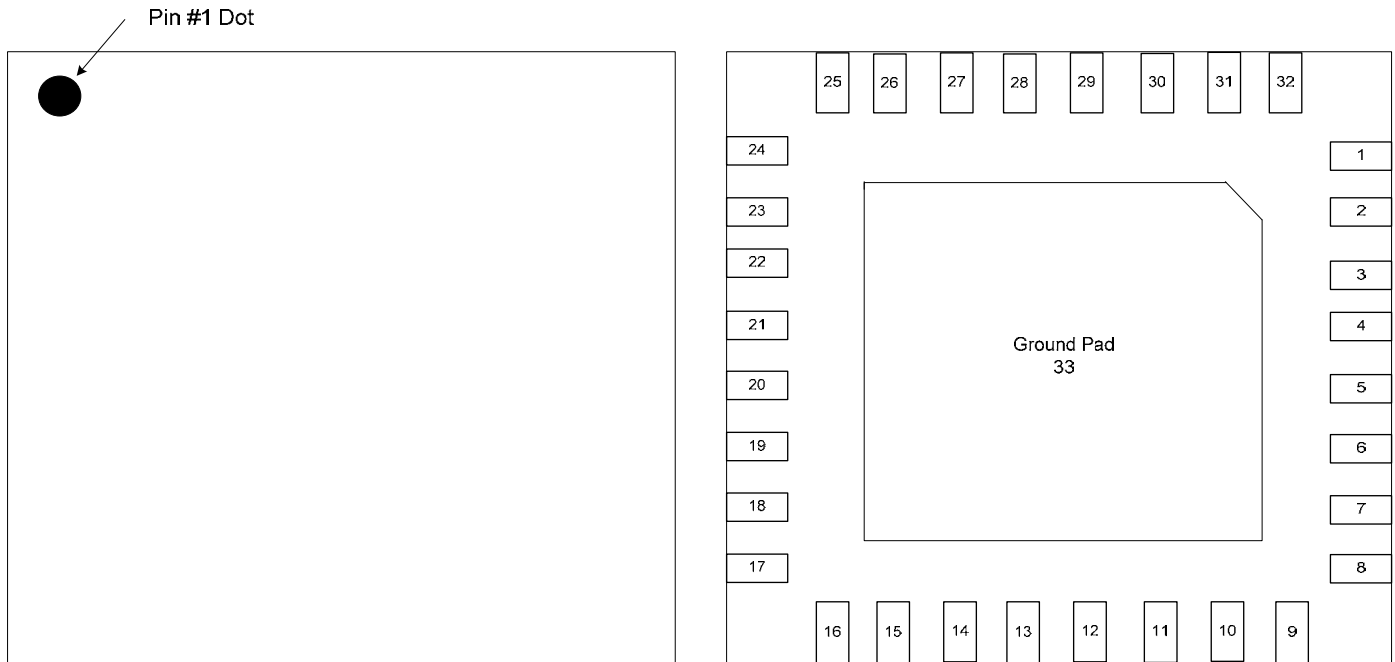


Pin	Description
4	RF Input
21	RF Output
10	Vg
31	Vd1
29	Vd2
28	Vd3
15, 26	Vd4
1, 3, 5, 8, 9, 16, 17, 20, 22, 24, 25, 32, 33	Ground
2, 6, 7, 11, 12, 13, 14, 18, 19, 23, 27, 30	N/C


MMA-273336-M5

27 - 33 GHz, 4 W MMIC Power Amplifier

Mechanical Information:

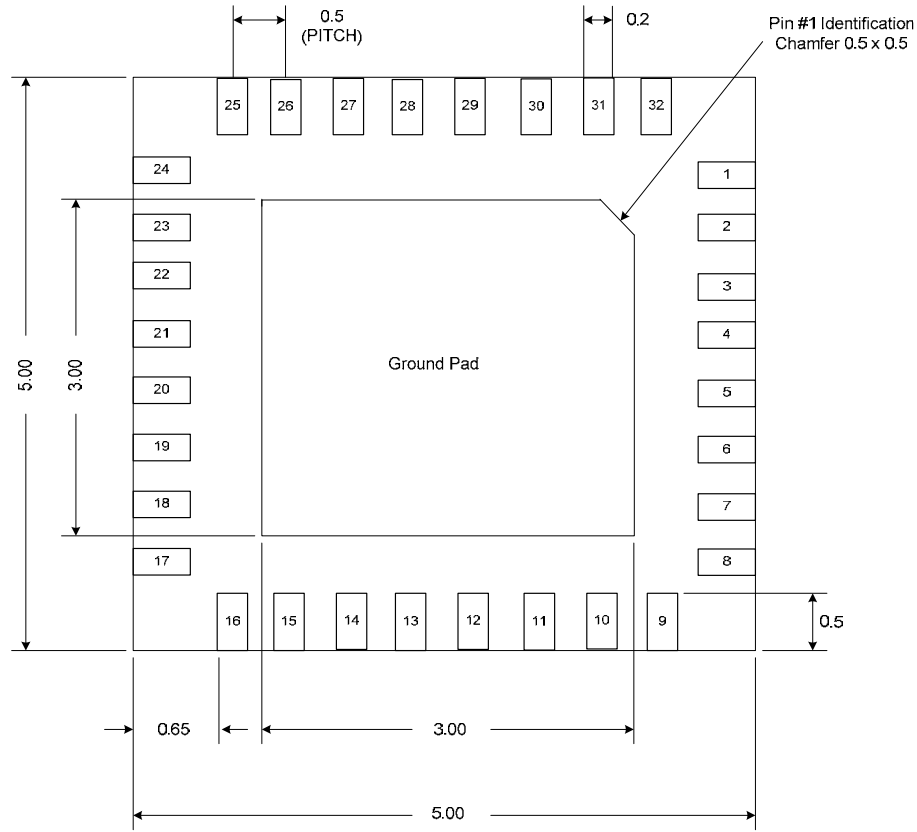

BOTTOM VIEW




SIDE VIEW

The units are in [mm].

MMA-273336-M5

27 - 33 GHz, 4 W MMIC Power Amplifier

Application Circuit:

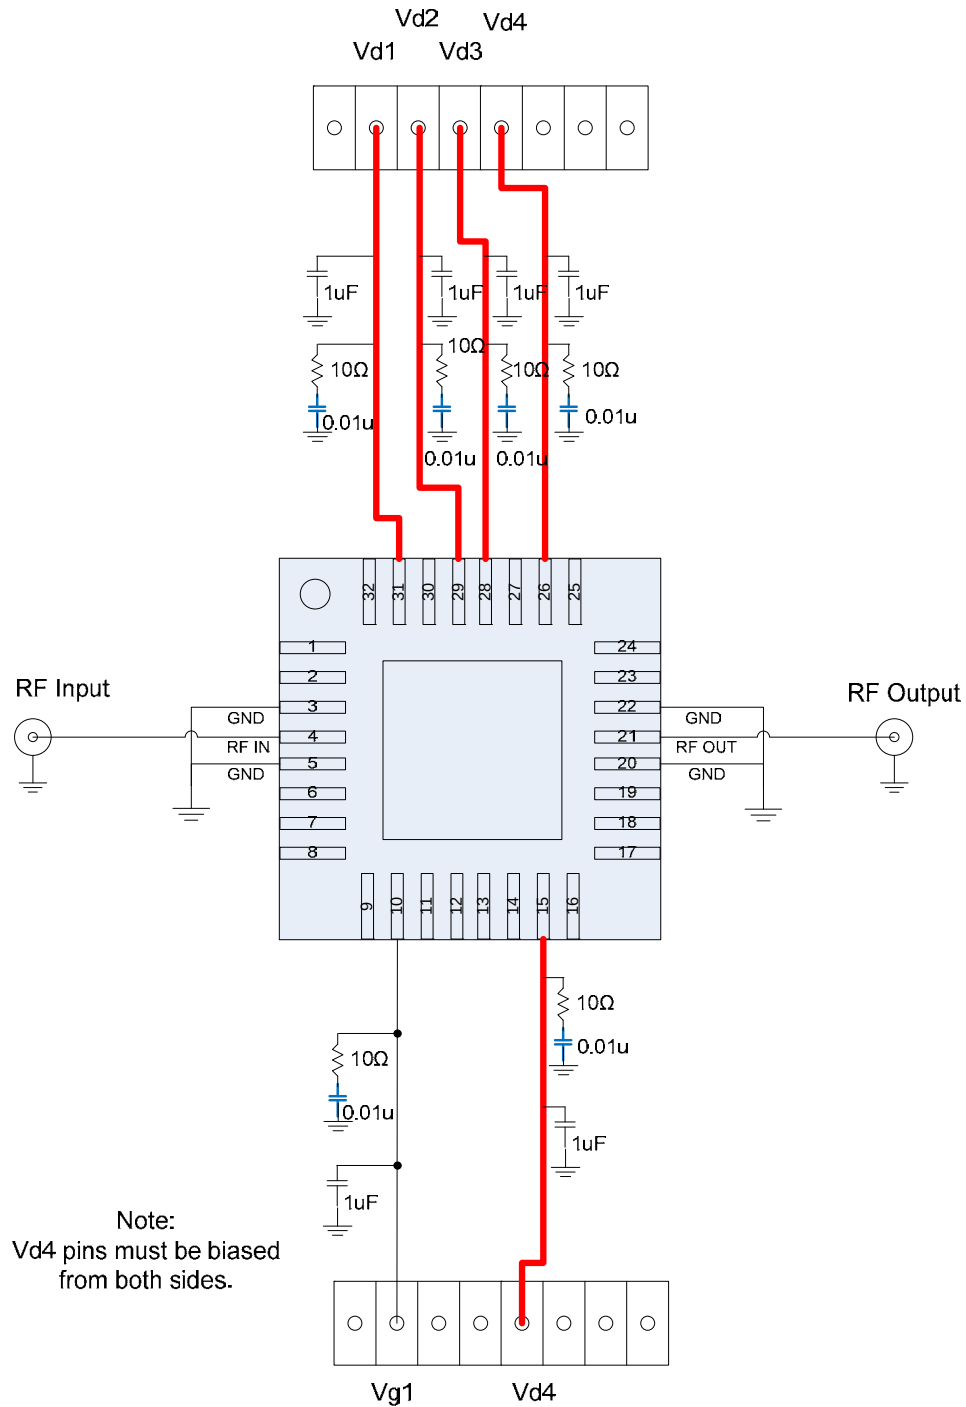


MMA-273336-M5

27 - 33 GHz, 4 W MMIC Power Amplifier

Recommended Application Board Design:

Board Material is 10 mil (Dielectric) thickness Rogers 4350B with 0.5 oz copper clads.

Board is soldered on a gold plated solid copper block and adequate heat-sinking is required for 16.8 W total power dissipation.

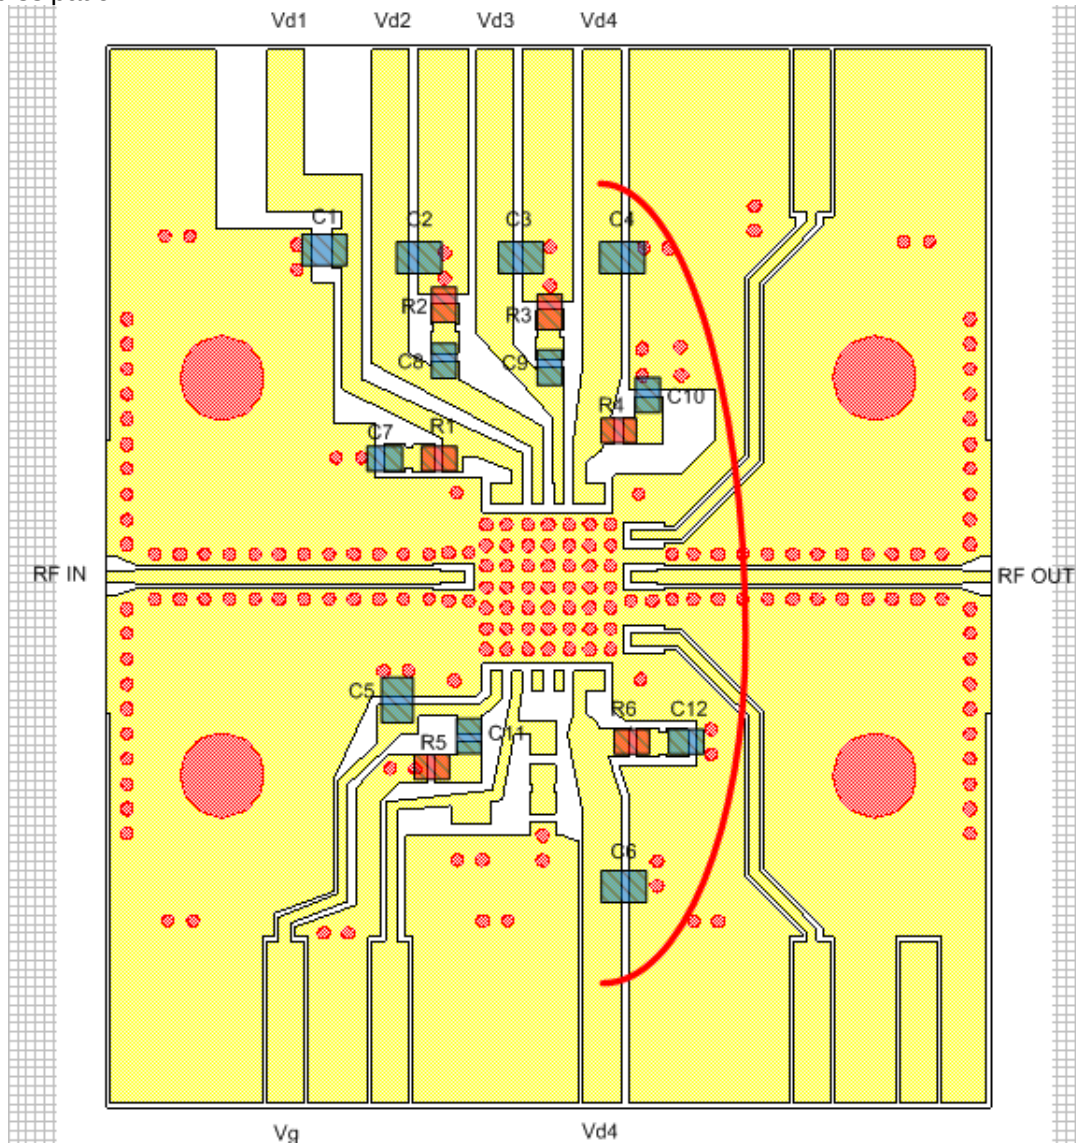


Part	Description
C1, C2, C3, C4, C5, C6	1 μ F Capacitor (0603)
C7, C8, C9, C10, C11, C12	0.01 μ F Capacitor (0402)
R1, R2, R3, R4, R5, R6	10 Ω Resistor (0402)

MMA-273336-M5

27 - 33 GHz, 4 W MMIC Power Amplifier

Recommended Application Board Design:

Board Material is 10 mil (Dielectric) thickness Rogers 4350B with 0.5 oz copper clads. The board material and mounting pattern, as defined in the data sheet, optimizes RF performance and is strongly recommended.

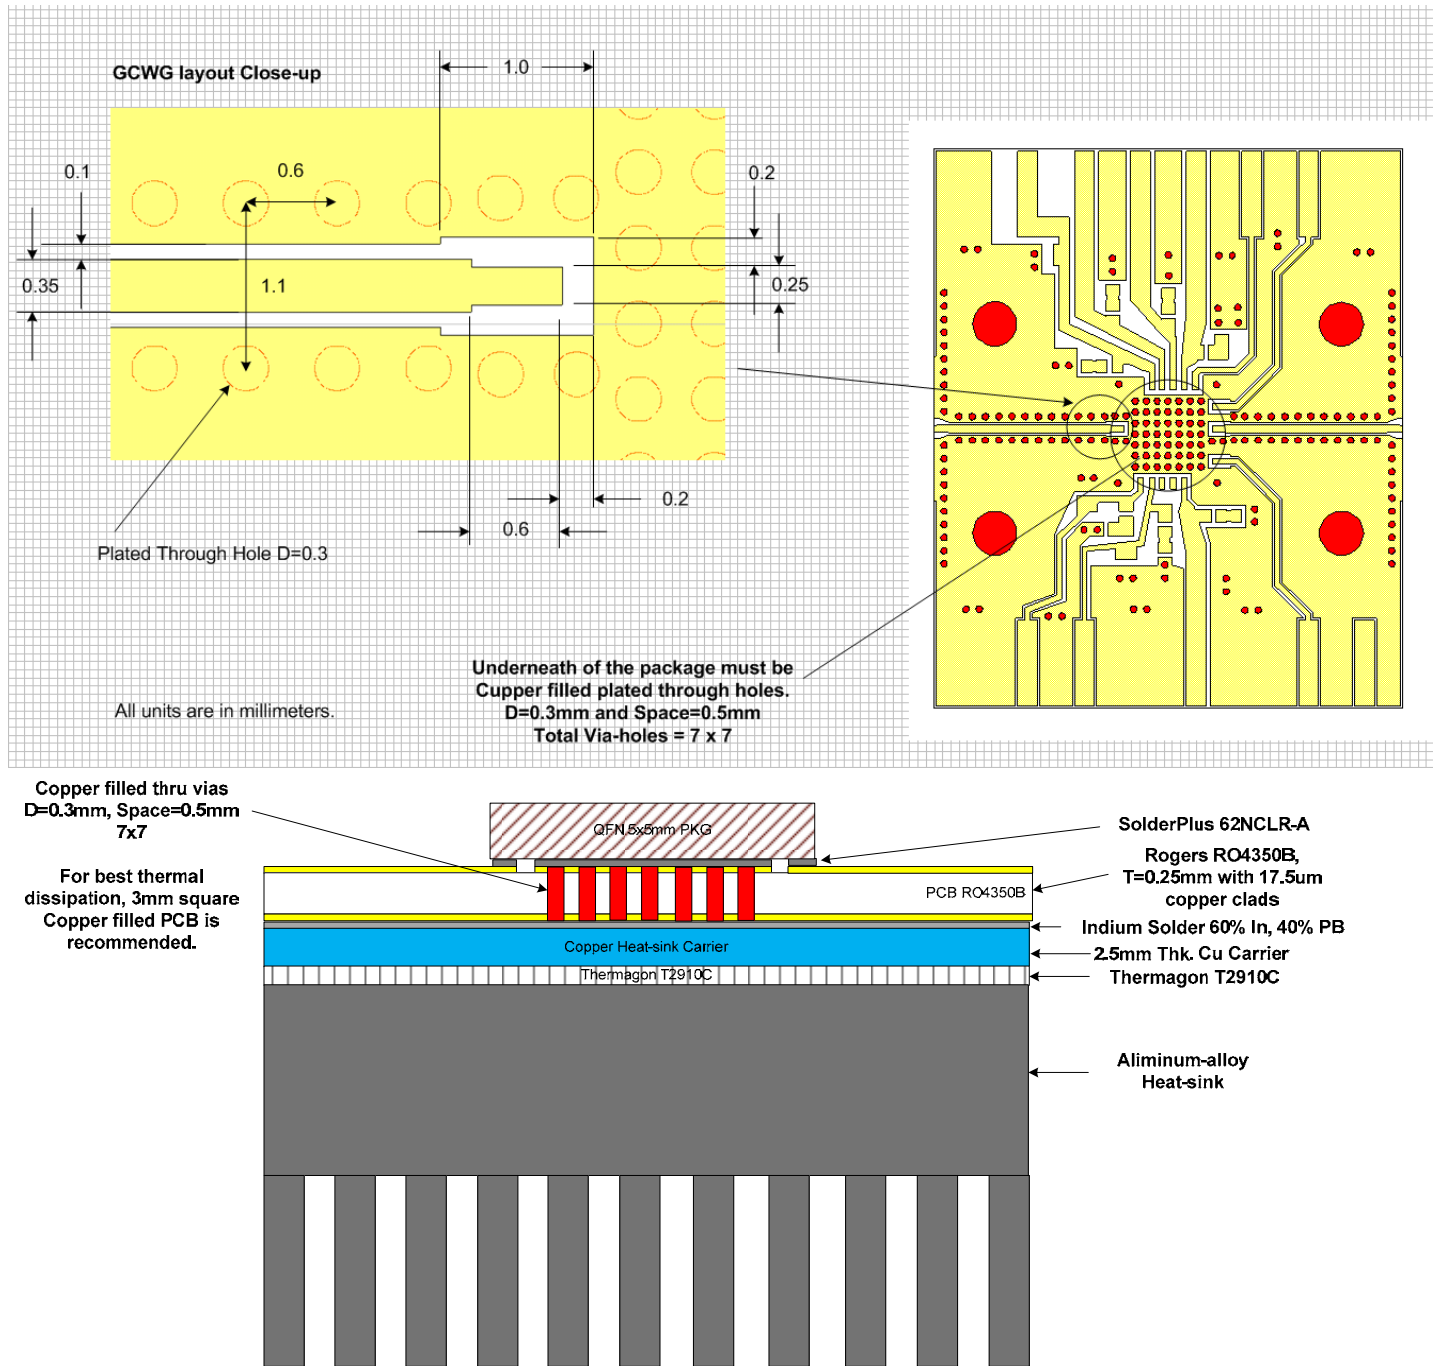

RoHS Compliance



CML Micro certifies, to the best of our knowledge, that its products comply with RoHS directive (2011/65/EU), as amended by Directive (EU) 2015/863.

REACH Compliance



CML Micro certifies, to the best of our knowledge, that its products do not contain any of the banned substances specified in the SVHC list at <https://echa.europa.eu/candidate-list-table>. CML Micro are committed to ensuring the safety of products and the compliance with regulations. Publications will be updated in the event that REACH control is compromised.

Contact Information

For further information please contact your local CML sales representative.
Contact details can be found at www.cmlmicro.com.

Important notice: The information provided in this document is believed to be accurate and reliable however, CML assumes no responsibility for any errors or omissions in this document. CML reserves the right to make changes to this document at any time without notice.

The product(s) referenced within this document are not designed, authorized, or warranted for use in life support, life-critical, surgical or nuclear applications, nor in any application where the failure of the product could create a situation where personal injury or death may occur. Customers using or selling the product for such applications do so entirely at their own risk and without any recourse to CML, financial or otherwise.

CML assumes no liability for applications assistance or the design of customers' products. Customers are solely responsible for the design, validation, and testing of customer products as well as compliance with all legal, regulatory, and safety-related requirements concerning their applications.

ALL SPECIFICATIONS AND DATA ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. PRODUCTS ARE PROVIDED UNDER THE TERMS OF CML'S CONDITIONS OF SALE.

Nothing in this document or any purchase of CML products shall be construed as granting any license, whether express or implied, under any patent, copyright, trade secret, or other intellectual property right owned or controlled by CML.