


MwT-PH15F 28 GHz Medium Power AlGaAs/InGaAs pHEMT

Features:

- 28.5 dBm typical Output Power at 18 GHz
- 12 dB typical Small Signal Gain at 18 GHz
- 45 % typical PAE at 18 GHz
- 0.25 x 630 μm Refractory Metal / Gold Gate
- Excellent for Power, Gain, and High Power Added Efficiency
- Ideal for Commercial, Military, Hi-Rel Space Applications

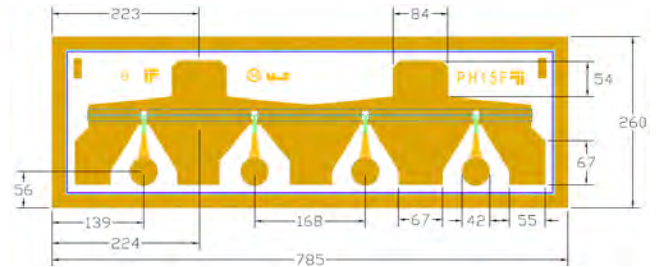

Chip Dimensions: 785 x 260 μm
Chip Thickness: 100 μm

Description:

The MwT-PH15F is a AlGaAs/InGaAs pHEMT (Pseudomorphic-High-Electron-Mobility-Transistor) device whose nominal 0.25 micron gate length and 630 micron gate width make it ideally suited for applications requiring high-gain and medium power with frequency up to 28 GHz. The device is equally effective for either wideband (e.g. 6 to 18 GHz) or narrow-band applications. The chip is produced using reliable metal systems and passivated to insure excellent reliability.

Electrical Specifications: at $T_a = 25^\circ\text{C}$

PARAMETERS & CONDITIONS	SYMBOL	FREQ	UNITS	MIN	TYP
Output Power at 1dB Compression $V_{ds}=8V$; $I_{ds}=0.7 \times I_{DSS}$	P1dB	18 GHz	dBm		28.0
Saturated Power $V_{ds}=8V$; $I_{ds}=0.7 \times I_{DSS}$	Psat	18 GHz	dBm		28.5
Output Third Order Intercept Point $V_{ds}=8V$; $I_{ds}=0.7 \times I_{DSS}$	OIP3	18 GHz	dBm		34.0
Small Signal Gain $V_{ds}=8V$; $I_{ds}=0.7 \times I_{DSS}$	SSG	18 GHz	dB		12.0
Power Added Efficiency at P1dB $V_{ds}=8V$; $I_{ds}=0.7 \times I_{DSS}$	PAE	18 GHz	%		45

Note: I_{ds} should be between 40% and 80% of I_{DSS} . Currently, our data shows I_{ds} at 70% of I_{DSS} . Low I_{ds} will improve efficiency, but high I_{ds} will make Psat and IP3 better.

DC Specifications: at $T_a = 25^\circ\text{C}$


PARAMETERS & CONDITIONS	SYMBOL	UNITS	MIN	TYP	MAX
Saturated Drain Current $V_{ds}= 3.0\text{ V}$ $V_{gs}= 0.0\text{ V}$	I_{DSS}	mA	150		190
Transconductance $V_{ds}= 2.5\text{ V}$ $V_{gs}= 0.0\text{ V}$	G_m	mS		200	
Pinch-off Voltage $V_{ds}= 3.0\text{ V}$ $I_{ds}= 1.0\text{ mA}$	V_p	V		-0.8	-1.0
Gate-to-Source Breakdown Voltage $I_{gs}= -0.3\text{ mA}$	BVGSO	V		-17.0	
Gate-to-Drain Breakdown Voltage $I_{gd}= -0.3\text{ mA}$	BVGDO	V		-18.0	
Chip Thermal Resistance	R_{th}	C/W		150 350*	

* Overall R_{th} depends on case mounting


MwT-PH15F

28 GHz Medium Power AlGaAs/InGaAs pHEMT

MwTPH15F, Gain, Po & PAE vs Pin at 18GHz
Vds=8V; Idq=0.7xIDSS

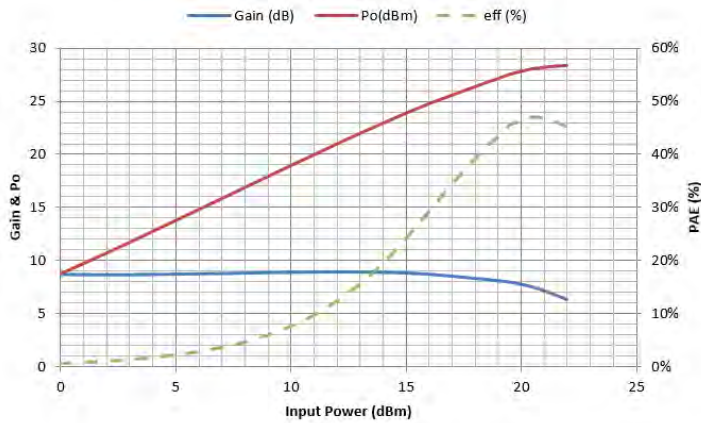

MwT-PH15F, OIP3 at different Idq vs Po/tone at 18GHz

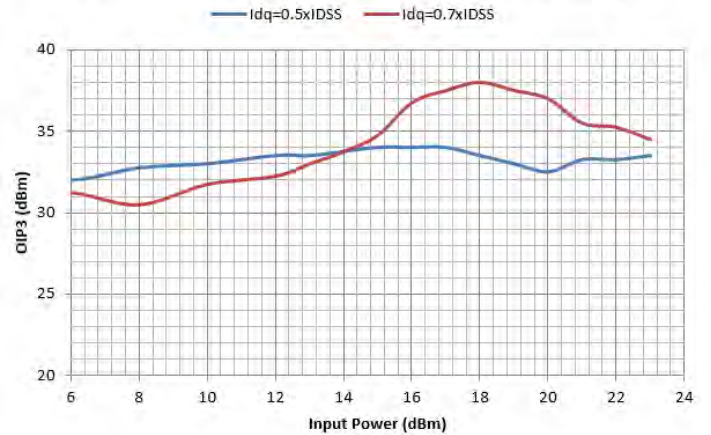

MwT-PH15F, Load Power Data, Vds=8V, Idq=0.7xIdss

Freq (GHz)	Zs		ZL		P _{sat} dBm
	Mag	phase	mag	phase	
2	0.60	80.0	0.09	173.3	28.4
4	0.70	120.0	0.19	136.2	28.1
6	0.75	140.0	0.19	143.3	28.4
8	0.87	145.0	0.25	131.7	28.2
10	0.84	160.0	0.29	127.4	28.1
12	0.87	158.0	0.29	131.3	28.5

The load pull data is based on nonlinear model provided by the foundry that processes the device.

ESD Caution




High-performance RF integrated circuits are highly sensitive to electrostatic discharge (ESD) and may contain unprotected inputs and outputs. Handling and assembly should be conducted in an ESD-controlled environment. It is recommended that ESD precautions and protocols are adopted to minimise the risk of electrostatic discharge and protect product integrity.


MwT-PH15F

28 GHz Medium Power AlGaAs/InGaAs pHEMT

MwT-PH15F DUAL BIAS

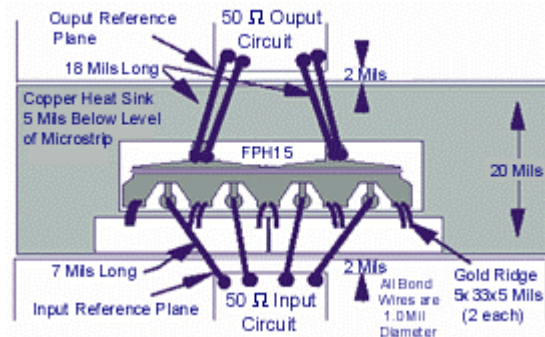

SAFE OPERATING LIMITS vs BACKSIDE TEMPERATURE
MwT-PH15F Chip and 71 Pkg

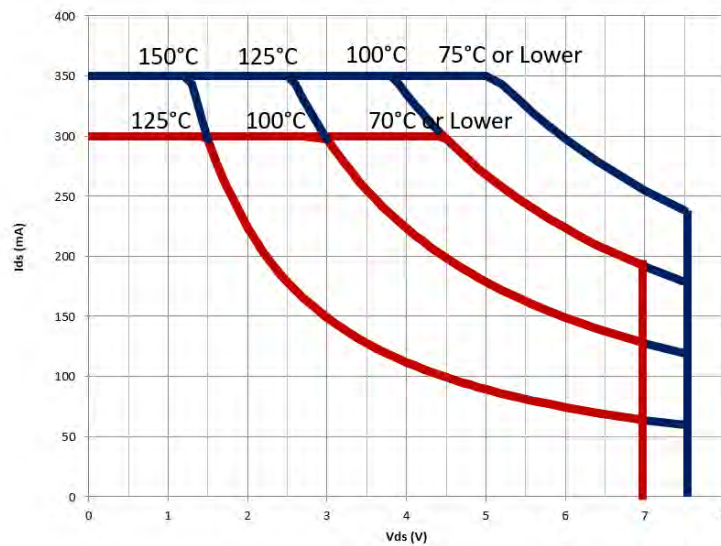

MAXIMUM RATINGS AT Ta = 25 °C

Symbol	Parameter	Units	Cont Max1	Absolute Max2
VDS	Drain to Source Volt.	V	7.5	8.0
Tch	Channel Temperature	°C	+150	+175
Tst	Storage Temperature	°C	-65 to +150	+175
Pin	RF Input Power	mW	200	300
Pt	Total Power Dissipation	mW	1900	2300

Notes:

1. Exceeding any one of these limits in continuous operation may reduce the mean-time- to-failure below the design goal.
2. Exceeding any one of these limits may cause permanent damage.

MwT-PH15F

28 GHz Medium Power AlGaAs/InGaAs pHEMT

S-PARAMETER V_{ds}=7V, I_{ds}= 0.7 x I_{dss}

Freq. GHz	S11		S21		S12		S22		K	GMAX dB
	dB	Ang (°)	dB	Ang (°)	dB	Ang (°)	dB	Ang (°)		
1	-0.390	-59.911	22.734	144.444	-31.862	57.690	-4.544	-25.184	0.087	27.298
2	-0.762	-99.807	20.298	120.694	-28.498	37.989	-6.147	-40.126	0.135	24.398
3	-1.024	-123.262	17.856	105.447	-27.272	26.678	-7.331	-49.072	0.206	22.564
4	-1.112	-138.382	15.844	94.348	-26.856	19.448	-8.061	-55.741	0.266	21.350
5	-1.223	-148.957	14.128	85.818	-26.834	14.436	-8.270	-60.932	0.351	20.481
6	-1.247	-156.433	12.871	79.401	-26.631	11.775	-8.343	-62.561	0.408	19.751
7	-1.327	-163.022	11.651	72.422	-26.479	8.639	-8.311	-67.714	0.490	19.065
8	-1.152	-167.888	10.528	65.941	-26.710	5.733	-8.146	-74.597	0.474	18.619
9	-1.239	-173.045	9.464	59.899	-26.884	5.584	-8.250	-81.294	0.595	18.174
10	-1.172	-178.241	8.456	54.057	-27.081	2.444	-7.898	-86.878	0.629	17.769
11	-1.256	177.316	7.504	48.646	-27.125	1.842	-7.865	-91.669	0.771	17.315
12	-1.223	174.171	6.761	43.499	-27.490	1.241	-7.442	-97.159	0.828	17.126
13	-1.227	170.860	5.971	38.361	-27.797	0.097	-7.108	-102.609	0.931	16.884
14	-1.273	168.002	5.223	33.721	-27.958	1.263	-6.844	-108.607	1.060	15.095
15	-1.253	165.355	4.597	29.617	-28.433	2.102	-6.514	-113.117	1.163	14.068
16	-1.191	162.736	3.799	23.341	-28.611	3.110	-6.175	-117.598	1.206	13.464
17	-1.122	160.699	3.227	18.889	-28.530	4.625	-5.904	-122.296	1.155	13.492
18	-1.144	158.118	2.687	14.069	-28.817	5.616	-5.520	-126.821	1.258	12.698
19	-1.141	155.746	2.002	10.313	-29.172	8.971	-5.285	-131.188	1.403	11.807
20	-1.090	154.379	1.471	5.545	-29.166	11.016	-4.984	-135.947	1.361	11.730
21	-1.076	152.593	0.894	1.684	-29.076	14.604	-4.702	-140.580	1.368	11.364
22	-1.090	151.191	0.235	-2.218	-29.203	17.357	-4.432	-143.984	1.486	10.595
23	-1.046	149.091	-0.285	-6.346	-29.003	20.742	-4.188	-148.368	1.415	10.528
24	-1.107	147.083	-0.814	-10.005	-27.856	22.424	-3.971	-151.809	1.315	10.160
25	-1.031	146.378	-1.327	-14.109	-28.102	22.975	-3.721	-155.381	1.267	10.283
26	-1.033	144.630	-1.879	-17.297	-27.717	25.019	-3.535	-158.479	1.246	9.932
27	-1.069	143.710	-2.428	-20.881	-27.097	27.762	-3.260	-162.381	1.193	9.681
28	-0.933	142.159	-2.888	-24.105	-26.834	29.222	-3.088	-165.394	0.968	11.973
29	-0.955	140.332	-3.321	-27.723	-26.590	28.173	-2.924	-168.123	0.965	11.635
30	-0.952	139.172	-3.779	-31.184	-26.442	28.868	-2.763	-171.477	0.953	11.331

Available Packaging:

70 Package - MwT-PH8F70
71 Package - MwT-PH8F71
73 Package - MwT-PH8F73

RoHS Compliance



CML Micro certifies, to the best of our knowledge, that its products comply with RoHS directive (2011/65/EU), as amended by Directive (EU) 2015/863.

REACH Compliance



CML Micro certifies, to the best of our knowledge, that its products do not contain any of the banned substances specified in the SVHC list at <https://echa.europa.eu/candidate-list-table>. CML Micro are committed to ensuring the safety of products and the compliance with regulations. Publications will be updated in the event that REACH control is compromised.

Contact Information

For further information please contact your local CML sales representative.
Contact details can be found at www.cmlmicro.com.

Important notice: The information provided in this document is believed to be accurate and reliable however, CML assumes no responsibility for any errors or omissions in this document. CML reserves the right to make changes to this document at any time without notice.

The product(s) referenced within this document are not designed, authorized, or warranted for use in life support, life-critical, surgical or nuclear applications, nor in any application where the failure of the product could create a situation where personal injury or death may occur. Customers using or selling the product for such applications do so entirely at their own risk and without any recourse to CML, financial or otherwise.

CML assumes no liability for applications assistance or the design of customers' products. Customers are solely responsible for the design, validation, and testing of customer products as well as compliance with all legal, regulatory, and safety-related requirements concerning their applications.

ALL SPECIFICATIONS AND DATA ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. PRODUCTS ARE PROVIDED UNDER THE TERMS OF CML'S CONDITIONS OF SALE.

Nothing in this document or any purchase of CML products shall be construed as granting any license, whether express or implied, under any patent, copyright, trade secret, or other intellectual property right owned or controlled by CML.