


MwT-PH27F 26 GHz Medium Power AlGaAs/InGaAs pHEMT

Features:

- 25 dBm of Power at 18 GHz
- 14 dB Small Signal Gain at 18 GHz
- 45 % PAE at 18 GHz
- 0.25 x 400 Micron Refractory Metal/Gold Gate
- Excellent for Medium Power, Gain, and High Power Added Efficiency
- Ideal for Commercial, Military, Hi-Rel Space Applications

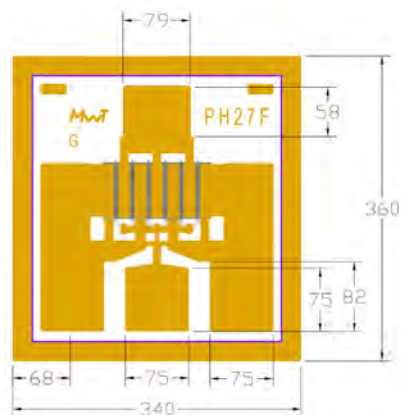

Chip Dimensions: 340 x 360 microns
Chip Thickness: 100 microns

Description:

The MwT-PH27F is a AlGaAs/InGaAs pHEMT (Pseudomorphic-High-Electron-Mobility-Transistor) device whose nominal 0.25μm gate length and 400 μm gate width make it ideally suited for applications requiring high-gain and medium power up to 26 GHz frequency range. The device is equally effective for either wideband (e.g. 6 to 18 GHz) or narrow-band applications. The chip is produced using reliable metal systems and passivated to insure excellent reliability.

Electrical Specifications: at $T_a = 25^\circ\text{C}$

PARAMETERS & CONDITIONS	SYMBOL	FREQ	UNITS	MIN	TYP
Output Power at 1dB Compression $V_{ds}=9.0\text{V}$ $I_{ds}=0.7 \times I_{DSS}$	P1dB	18 GHz	dBm		22.5
Saturated Power $V_{ds}=9.0\text{V}$ $I_{ds}=0.7 \times I_{DSS}$	Psat	18 GHz	dBm		25.0
Output Third Order Intercept Point $V_{ds}=9.0\text{V}$ $I_{ds}=0.7 \times I_{DSS}$	OIP3	18 GHz	dBm		31.0
Small Signal Gain $V_{ds}=9.0\text{V}$ $I_{ds}=0.7 \times I_{DSS}$	SSG	18 GHz	dB		16.0
Power Added Efficiency at P1dB $V_{ds}=9.0\text{V}$ $I_{ds}=0.7 \times I_{DSS}$	PAE	18 GHz	%		45

Note: I_{ds} should be between 40% and 80% of I_{DSS} . Currently, our data shows I_{ds} at 70% of I_{DSS} . Low I_{ds} will improve efficiency, but high I_{ds} will make Psat and IP3 better.

DC Specifications: at $T_a = 25^\circ\text{C}$


PARAMETERS & CONDITIONS	SYMBOL	UNITS	MIN	TYP	MAX
Saturated Drain Current $V_{ds}=3.0\text{V}$ $V_{gs}=0.0\text{V}$	I_{DSS}	mA	90		120
Transconductance $V_{ds}=2.5\text{V}$ $V_{gs}=0.0\text{V}$	Gm	mS		140	
Pinch-off Voltage $V_{ds}=3.0\text{V}$ $I_{ds}=1.0\text{mA}$	V_p	V		-0.8	-1.0
Gate-to-Source Breakdown Voltage $I_{gs}=-0.3\text{mA}$	BVGSO	V		-18.0	
Gate-to-Drain Breakdown Voltage $I_{gd}=-0.3\text{mA}$	BVGDO	V		-18.0	
Chip Thermal Resistance	Rth	C/W		95 225*	

* Overall Rth depends on case mounting


MwT-PH27F

26 GHz Medium Power AlGaAs/InGaAs pHEMT

MwT-PH27F, Po, Gain & PAE vs Pin
Vds=8V; Idq=0.7xIdss

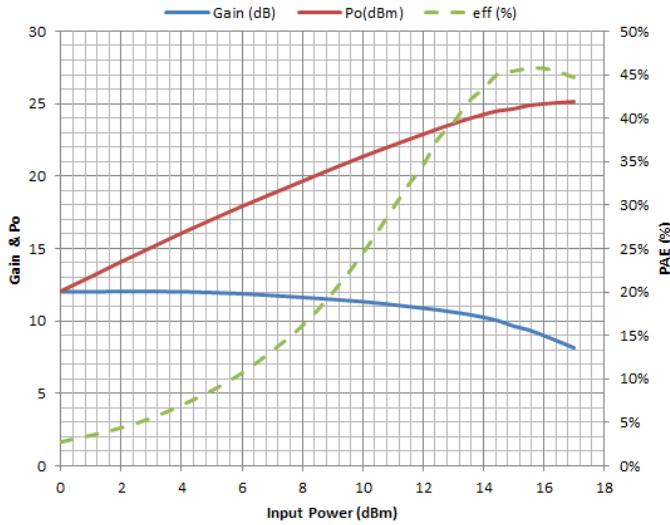

MwT-PH27F, OIP3 vs Po/tone
with different Idq

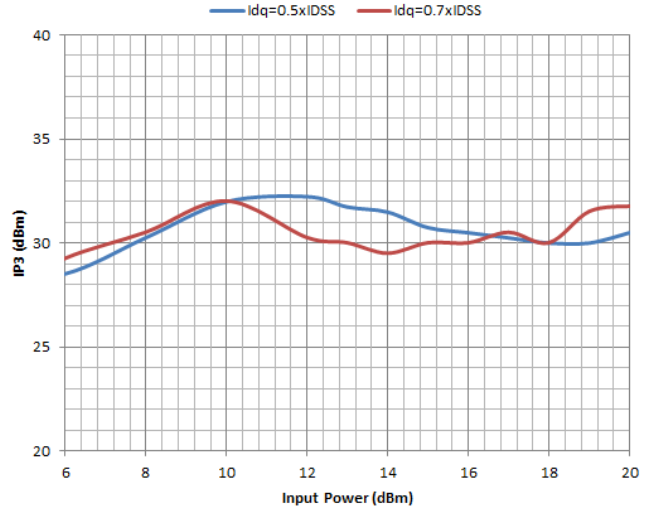

MwT-PH27F, Load Pull Data, Vd_q=8V; Id_q=0.7xIdss

Freq (GHz)	Z _s		Z _L		Psat dBm
	Mag	phase	mag	phase	
2	0.84	50.00	0.16	22.56	25.8
4	0.77	90.00	0.17	33.56	25.9
6	0.76	112.00	0.19	46.65	25.8
8	0.79	129.00	0.28	65.03	25.6
10	0.80	137.00	0.28	70.74	25.7
12	0.82	149.00	0.35	78.36	25.5
14	0.86	151.00	0.38	83.73	25.3
16	0.83	160.00	0.38	84.90	25.3
18	0.85	164.00	0.43	97.06	25.3

The load pull data is based on nonlinear model provided by the foundry that processes the device.

ESD Caution






High-performance RF integrated circuits are highly sensitive to electrostatic discharge (ESD) and may contain unprotected inputs and outputs. Handling and assembly should be conducted in an ESD-controlled environment. It is recommended that ESD precautions and protocols are adopted to minimise the risk of electrostatic discharge and protect product integrity.

MwT-PH27F

26 GHz Medium Power AlGaAs/InGaAs pHEMT

MwT-PH27F DUAL BIAS

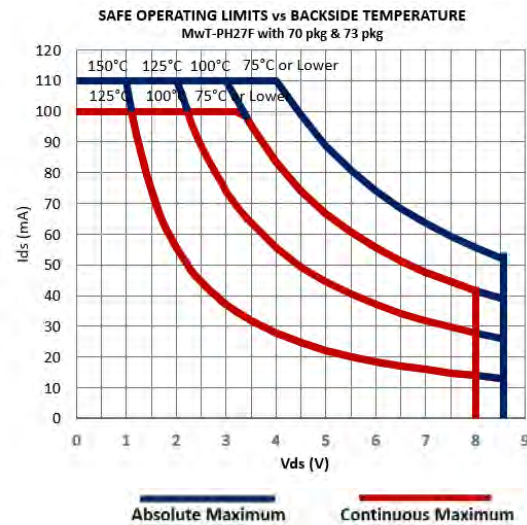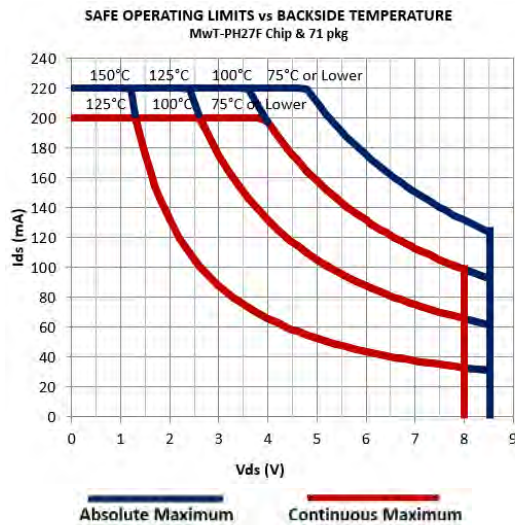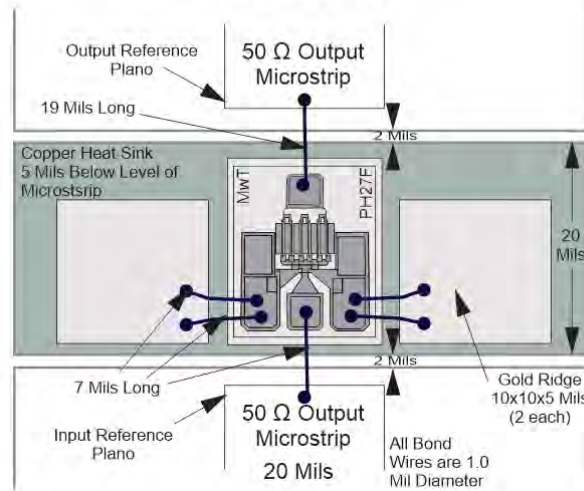

Absolute Maximum Rating

Symbol	Parameter	Units	Cont Max1	Absolute Max2
VDS	Drain to Source Volt.	V	8.0	8.5
Tch	Channel Temperature	°C	+150	+175
Tst	Storage Temperature	°C	-65 to +150	+175
Pin	RF Input Power	mW	130	200

Notes:

- Exceeding any one of these limits in continuous operation may reduce the mean-time-to-failure below the design goal.
- Exceeding any one of these limits may cause permanent damage.

S-Parameters

S-PARAMETER Vds=8V, Ids= 0.7 x Idss										
Freq.	S11		S21		S12		S22		K	GMAX
GHz	dB	Ang (°)	dB	Ang (°)	dB	Ang (°)	dB	Ang (°)		dB
1	-0.231	-32.694	19.665	158.071	-36.548	72.399	-2.160	-8.934	0.115	28.106
2	-0.640	-61.163	18.651	140.369	-31.601	59.978	-2.672	-15.713	0.166	25.126
3	-1.079	-85.153	17.410	125.221	-29.335	48.992	-3.170	-21.042	0.241	23.373
4	-1.386	-104.475	16.169	112.916	-28.102	41.107	-3.610	-24.819	0.302	22.135
5	-1.761	-119.922	14.784	102.685	-27.581	35.053	-4.099	-28.464	0.417	21.182
6	-1.983	-131.782	13.725	94.677	-27.048	31.418	-4.315	-30.382	0.491	20.387
7	-2.195	-143.772	12.685	86.683	-26.970	28.522	-4.557	-32.770	0.594	19.827
8	-2.134	-152.508	11.837	79.877	-26.604	26.067	-4.718	-37.131	0.599	19.221
9	-2.148	-161.518	10.655	72.635	-26.825	25.021	-5.079	-39.773	0.732	18.740
10	-2.158	-168.517	10.045	66.584	-26.674	22.641	-4.987	-43.411	0.753	18.359
11	-2.025	-175.835	9.363	59.695	-26.844	22.444	-5.178	-46.034	0.794	18.104
12	-1.978	178.553	8.602	54.635	-26.802	21.868	-5.321	-49.977	0.847	17.702
13	-1.996	173.295	7.922	48.918	-26.939	22.962	-5.368	-53.571	0.936	17.430
14	-1.927	168.420	7.163	43.642	-26.876	23.745	-5.449	-57.977	0.978	17.019
15	-1.898	163.936	6.736	38.677	-26.939	25.503	-5.572	-61.784	1.025	15.867
16	-1.827	159.393	6.173	34.214	-26.768	28.271	-5.517	-66.454	0.999	16.470
17	-1.893	155.811	5.549	29.308	-26.693	29.474	-5.498	-72.013	1.104	14.159
18	-1.663	152.829	4.955	25.013	-26.406	32.946	-5.506	-77.229	0.976	15.680
19	-1.645	151.205	4.537	20.792	-26.107	35.919	-5.459	-81.318	0.963	15.322
20	-1.565	145.351	4.104	15.854	-25.883	36.755	-5.557	-86.388	0.943	14.994
21	-1.581	143.051	3.545	9.574	-25.354	38.691	-5.335	-92.138	0.919	14.449
22	-1.579	140.188	3.124	5.470	-25.001	40.464	-5.284	-97.372	0.918	14.063
23	-1.402	138.352	2.664	0.691	-24.223	41.543	-5.284	-103.922	0.745	13.443
24	-1.362	135.736	2.220	-4.336	-23.845	41.498	-5.275	-110.968	0.727	13.033
25	-1.418	133.109	1.672	-8.620	-23.266	42.930	-5.038	-117.456	0.740	12.469
26	-1.321	130.648	1.212	-13.116	-22.760	44.637	-4.872	-123.799	0.653	11.986
27	-1.187	128.092	0.790	-18.101	-22.283	45.873	-4.615	-129.916	0.526	11.537
28	-1.114	127.122	0.390	-22.352	-21.403	41.984	-4.480	-136.444	0.403	10.896
29	-1.131	123.760	-0.153	-26.948	-20.886	42.084	-4.328	-142.815	0.418	10.367
30	-1.124	122.425	-0.592	-31.182	-20.361	40.077	-4.008	-149.395	0.363	9.884

Available Packaging:

70 Package - MwT-PH27F70

71 Package - MwT-PH27F71

73 Package - MwT-PH27F73

RoHS Compliance



CML Micro certifies, to the best of our knowledge, that its products comply with RoHS directive (2011/65/EU), as amended by Directive (EU) 2015/863.

REACH Compliance



CML Micro certifies, to the best of our knowledge, that its products do not contain any of the banned substances specified in the SVHC list at <https://echa.europa.eu/candidate-list-table>. CML Micro are committed to ensuring the safety of products and the compliance with regulations. Publications will be updated in the event that REACH control is compromised.

Contact Information

For further information please contact your local CML sales representative.
Contact details can be found at www.cmlmicro.com.

Important notice: The information provided in this document is believed to be accurate and reliable however, CML assumes no responsibility for any errors or omissions in this document. CML reserves the right to make changes to this document at any time without notice.

The product(s) referenced within this document are not designed, authorized, or warranted for use in life support, life-critical, surgical or nuclear applications, nor in any application where the failure of the product could create a situation where personal injury or death may occur. Customers using or selling the product for such applications do so entirely at their own risk and without any recourse to CML, financial or otherwise.

CML assumes no liability for applications assistance or the design of customers' products. Customers are solely responsible for the design, validation, and testing of customer products as well as compliance with all legal, regulatory, and safety-related requirements concerning their applications.

ALL SPECIFICATIONS AND DATA ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. PRODUCTS ARE PROVIDED UNDER THE TERMS OF CML'S CONDITIONS OF SALE.

Nothing in this document or any purchase of CML products shall be construed as granting any license, whether express or implied, under any patent, copyright, trade secret, or other intellectual property right owned or controlled by CML.