


MwT-PH9F 26 GHz Medium Power AlGaAs/InGaAs pHEMT

Features:

- 28 dBm of typical Output Power at 12 GHz
- 13 dB typical Small Signal Gain at 12 GHz
- 45 % typical PAE at 12 GHz
- 0.25 μm x 750 μm Refractory Metal / Gold Gate
- Excellent for Power, Gain, and High Power Added Efficiency Applications
- Ideal for Commercial, Military, Hi-Rel Space Applications

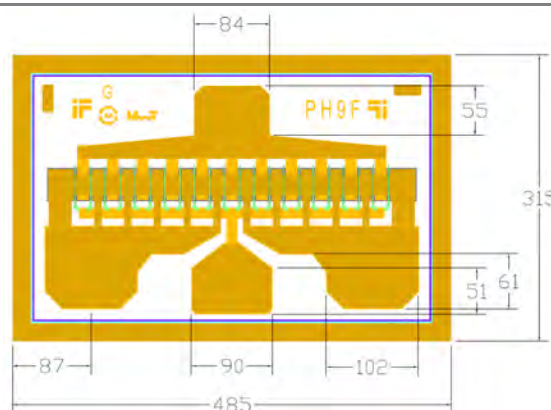

Chip Dimensions: 485 x 315 μm
Chip Thickness: 100 μm

Description:

The MwT-PH9F is a AlGaAs/InGaAs pHEMT (Pseudomorphic-High-Electron-Mobility-Transistor) device whose nominal 0.25 μm gate length and 750 μm gate width make it ideally suited for applications requiring high-gain and power up to 18 GHz frequency range with power outputs ranging from 400 to 500 milli-watts. The device is equally effective for either wideband (e.g. 6 to 18 GHz) or narrow-band applications. The chip is produced using reliable metal systems and passivated to insure excellent reliability.

Electrical Specifications: at $T_a = 25^\circ\text{C}$

PARAMETERS & CONDITIONS	SYMBOL	FREQ	UNITS	MIN	TYP
Output Power at 1dB Compression $V_{ds}=8.0\text{V}$ $I_{ds}=0.7I_{dss}$	P1dB	12 GHz	dBm		25.0
Saturated Power $V_{ds}=8.0\text{V}$ $I_{ds}=0.7I_{dss}$	Psat	12 GHz	dBm		28.0
Output Third Order Intercept Point $V_{ds}=8.0\text{V}$ $I_{ds}=0.7I_{dss}$	OIP3	12 GHz	dBm		34.0
Small Signal Gain $V_{ds}=8.0\text{V}$ $I_{ds}=0.7I_{dss}$	SSG	12 GHz	dB		13.0
Power Added Efficiency $V_{ds}=8.0\text{V}$ $I_{ds}=0.7I_{dss}$	PAE	12 GHz	%		45

Note: I_{ds} should be between 40% and 80% of I_{dss} . Currently, our data shows I_{ds} at 70% of I_{dss} . Low I_{ds} will improve efficiency, but high I_{ds} will make Psat and IP3 better.



DC Specifications: at $T_a = 25^\circ\text{C}$

PARAMETERS & CONDITIONS	SYMBOL	UNITS	MIN	TYP	MAX
Saturated Drain Current $V_{ds}= 4.0\text{V}$ $V_{gs}= 0.0\text{V}$	I_{DSS}	mA	180		220
Transconductance $V_{ds}= 2.5\text{V}$ $V_{gs}= 0.0\text{V}$	G_m	mS		270	
Pinch-off Voltage $V_{ds}= 3.0\text{V}$ $I_{ds}= 5.0\text{mA}$	V_p	V		-0.8	
Gate-to-Source Breakdown Voltage $I_{gs}= -1.0\text{mA}$	BVGSO	V		-17.0	
Gate-to-Drain Breakdown Voltage $I_{gd}= -1.0\text{mA}$	BVGDO	V		-18.0	
Chip Thermal Resistance	MwT-PH7F Chip & 70 pkg 71 pkg & 73 pkg	Rth	C/W	60 175*	

* Overall Rth depends on case mounting

MwT-PH9F

26 GHz Medium Power AlGaAs/InGaAs pHEMT

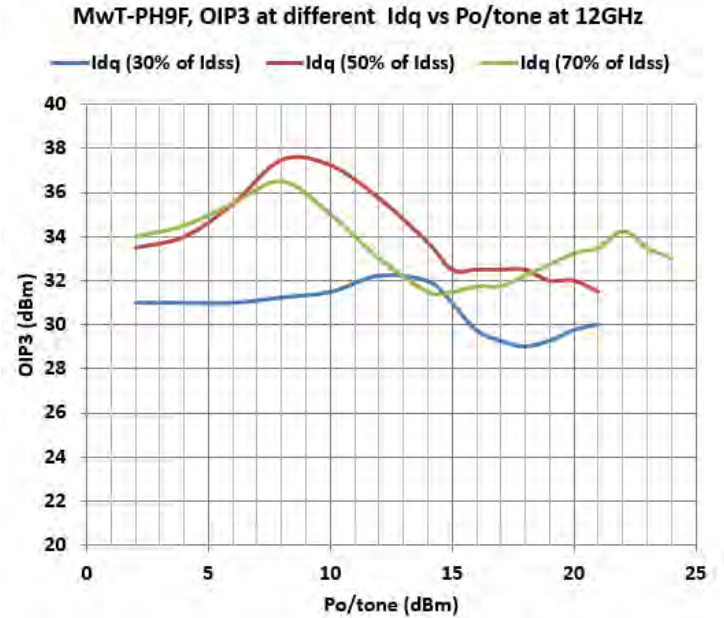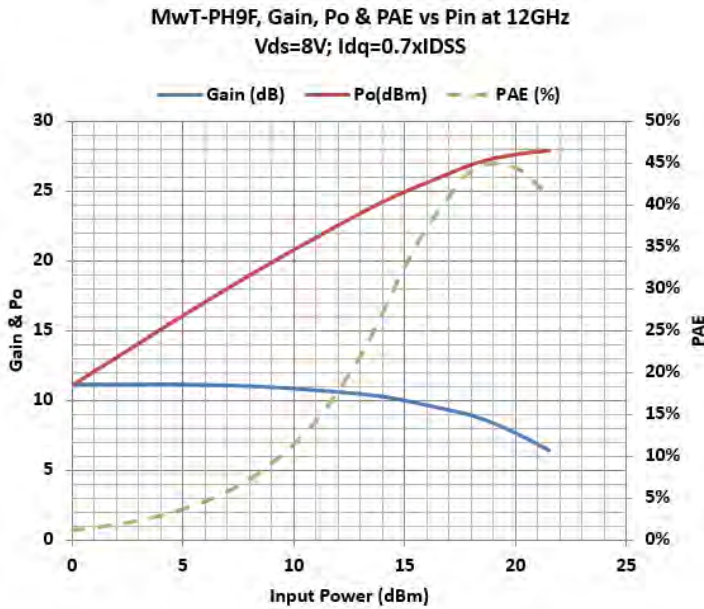

MwT-PH9F, Load Pull data for Power, Vds=8V, Idq=0.7xIdss

Freq (GHz)	Z _s		Z _L		P _{sat} dBm
	Mag	phase	mag	phase	
2	0.60	95.0	0.13	162.3	28.3
4	0.75	135.0	0.23	129.0	27.9
6	0.85	155.0	0.31	121.2	27.4
8	0.90	172.1	0.36	134.2	27.5
10	0.87	175.0	0.42	140.0	27.1
12	0.80	180.0	0.48	143.0	27.1

The load pull data is based on nonlinear model provided by the foundry that processes the device.

ESD Caution




High-performance RF integrated circuits are highly sensitive to electrostatic discharge (ESD) and may contain unprotected inputs and outputs. Handling and assembly should be conducted in an ESD-controlled environment. It is recommended that ESD precautions and protocols are adopted to minimise the risk of electrostatic discharge and protect product integrity.


MwT-PH9F

26 GHz Medium Power AlGaAs/InGaAs pHEMT


MwT-PH9F
DUAL BIAS

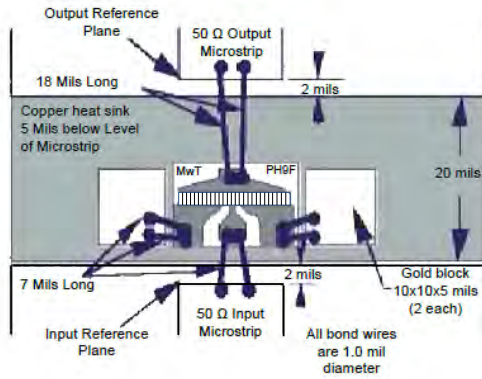


MwT-PH9F
OPTIONAL BONDING

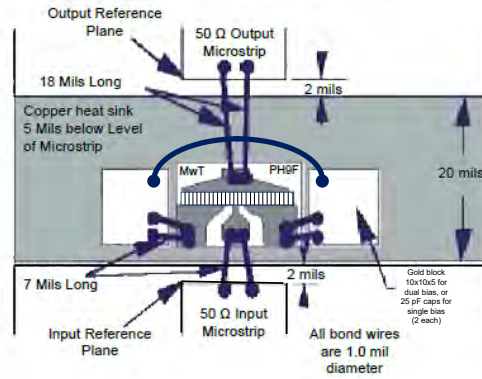

SAFE OPERATING LIMITS vs BACKSIDE TEMPERATURE
MwT-PH9F Chip and Pkg

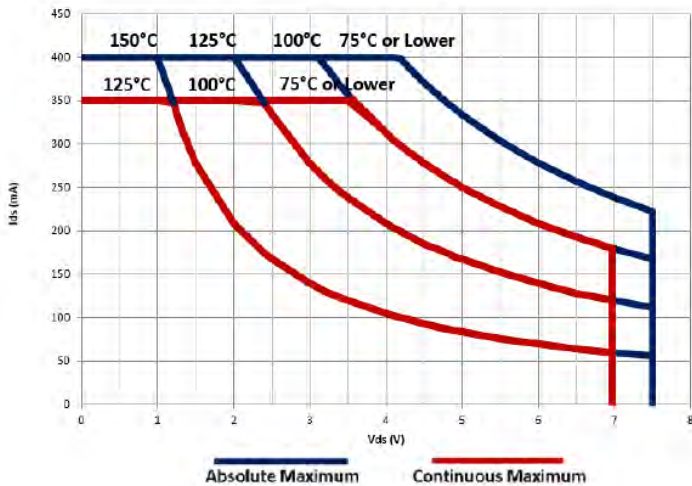

SAFE OPERATING LIMITS vs BACKSIDE TEMPERATURE
MwT-PH9F with 70Pkg and 73Pkg

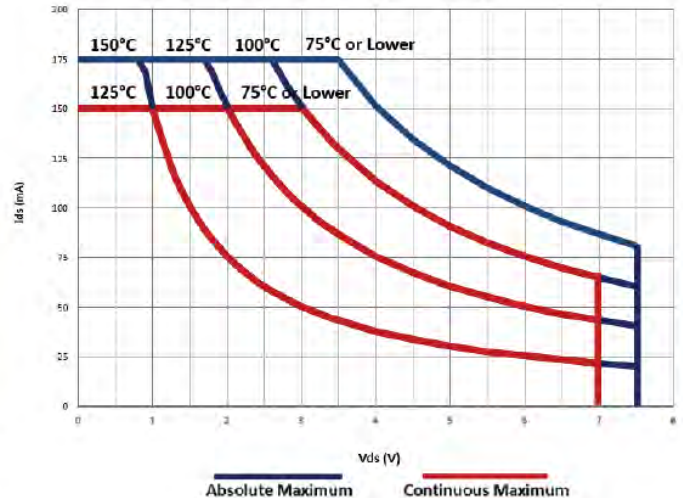

MAXIMUM RATINGS AT Ta = 25 °C

Symbol	Parameter	Units	Cont Max1	Absolute Max2
VDS	Drain to Source Volt.	V	7.5	8.0
Tch	Channel Temperature	°C	+150	+175
Tst	Storage Temperature	°C	-65 to +160	+180
Pin	RF Input Power	mW	240	360
Pt	Total Power Dissipation	mW	2700	3300

Notes:

- Exceeding any one of these limits in continuous operation may reduce the mean-time- to-failure below the design goal.
- Exceeding any one of these limits may cause permanent damage.

MwT-PH9F

26 GHz Medium Power AlGaAs/InGaAs pHEMT

S-PARAMETER V_{ds}=7V, I_{ds}= 0.7 x I_{dss}

Freq. GHz	S11		S21		S12		S22		K	GMAX dB
	dB	Ang (°)	dB	Ang (°)	dB	Ang (°)	dB	Ang (°)		
1	-0.806	-71.750	23.199	136.917	-31.422	55.413	-5.558	-29.458	0.160	27.311
2	-1.428	-113.508	20.042	112.384	-28.699	36.975	-7.682	-43.305	0.293	24.370
3	-1.757	-136.906	17.341	97.338	-27.887	31.296	-8.921	-51.462	0.423	22.614
4	-1.860	-152.417	15.171	86.096	-27.483	28.246	-9.550	-58.012	0.541	21.327
5	-1.934	-162.460	13.371	77.508	-27.441	27.615	-9.931	-64.349	0.690	20.406
6	-1.942	-171.023	11.954	70.007	-27.175	29.236	-9.980	-69.027	0.785	19.564
7	-1.925	-179.511	10.671	62.660	-26.964	30.240	-10.032	-75.342	0.882	18.818
8	-1.909	175.764	9.576	56.000	-26.819	32.373	-9.621	-84.018	0.957	18.197
9	-1.885	170.112	8.262	49.092	-26.727	36.176	-9.671	-92.272	1.114	15.441
10	-1.820	165.491	7.498	42.655	-26.162	37.670	-9.026	-98.865	1.064	15.289
11	-1.582	160.382	6.663	35.535	-25.749	41.269	-8.922	-106.277	0.978	16.206
12	-1.533	156.232	5.820	29.863	-25.115	42.802	-8.386	-113.358	0.949	15.467
13	-1.526	152.474	5.030	23.894	-24.580	45.652	-7.964	-120.820	0.970	14.805
14	-1.483	149.390	4.113	18.616	-23.921	48.373	-7.400	-128.071	0.957	14.017
15	-1.290	145.289	3.553	12.522	-23.108	49.400	-6.988	-134.137	0.786	13.330
16	-1.325	142.208	2.865	7.577	-22.361	49.584	-6.479	-140.954	0.786	12.613
17	-1.321	139.098	2.139	2.504	-21.684	49.431	-6.004	-147.257	0.770	11.912
18	-1.203	136.345	1.341	-2.284	-20.936	49.960	-5.502	-153.462	0.685	11.138
19	-1.110	134.426	0.696	-7.179	-20.259	48.203	-5.204	-158.917	0.601	10.477
20	-1.015	130.322	0.104	-12.077	-19.532	47.955	-4.738	-164.296	0.524	9.818
21	-1.017	128.019	-0.694	-18.027	-19.029	46.172	-4.320	-169.566	0.501	9.168
22	-1.028	125.679	-1.301	-21.732	-18.364	44.550	-3.915	-174.790	0.478	8.531
23	-0.837	123.850	-1.988	-26.246	-17.859	43.259	-3.662	179.806	0.371	7.936
24	-0.809	120.967	-2.790	-30.342	-17.310	41.366	-3.505	174.907	0.370	7.260
25	-0.988	118.586	-3.456	-33.601	-16.813	38.750	-3.008	169.245	0.434	6.678
26	-0.904	116.448	-4.198	-37.050	-16.373	37.589	-2.742	165.270	0.389	6.087
27	-0.838	113.305	-4.755	-40.152	-15.900	35.040	-2.580	161.352	0.356	5.572
28	-0.756	112.364	-5.522	-43.301	-15.525	31.987	-2.309	156.386	0.293	5.002
29	-0.799	109.303	-6.298	-45.678	-15.102	30.263	-2.175	153.018	0.336	4.402
30	-0.774	107.505	-6.888	-48.115	-14.632	27.968	-1.933	149.162	0.304	3.872

Available Packaging:

70 Package - MwT-PH9F70
71 Package - MwT-PH9F71
73 Package - MwT-PH9F73

RoHS Compliance



CML Micro certifies, to the best of our knowledge, that its products comply with RoHS directive (2011/65/EU), as amended by Directive (EU) 2015/863.

REACH Compliance



CML Micro certifies, to the best of our knowledge, that its products do not contain any of the banned substances specified in the SVHC list at <https://echa.europa.eu/candidate-list-table>. CML Micro are committed to ensuring the safety of products and the compliance with regulations. Publications will be updated in the event that REACH control is compromised.

Contact Information

For further information please contact your local CML sales representative.
Contact details can be found at www.cmlmicro.com.

Important notice: The information provided in this document is believed to be accurate and reliable however, CML assumes no responsibility for any errors or omissions in this document. CML reserves the right to make changes to this document at any time without notice.

The product(s) referenced within this document are not designed, authorized, or warranted for use in life support, life-critical, surgical or nuclear applications, nor in any application where the failure of the product could create a situation where personal injury or death may occur. Customers using or selling the product for such applications do so entirely at their own risk and without any recourse to CML, financial or otherwise.

CML assumes no liability for applications assistance or the design of customers' products. Customers are solely responsible for the design, validation, and testing of customer products as well as compliance with all legal, regulatory, and safety-related requirements concerning their applications.

ALL SPECIFICATIONS AND DATA ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. PRODUCTS ARE PROVIDED UNDER THE TERMS OF CML'S CONDITIONS OF SALE.

Nothing in this document or any purchase of CML products shall be construed as granting any license, whether express or implied, under any patent, copyright, trade secret, or other intellectual property right owned or controlled by CML.